B/94061/89 FRONT ELEVATION 12/89

Planning Permit No .....

APPROVED

Subject to the conditions in this office letter No. B/11358 Dt. 22.6.89 & 6869 dt. 20/12/89

for MEMBER SECRETARY
MADRAS METROPOLITAN DEVELOPMENT AUTHORITY

15/12/89

SCHEDULE OF OPENINGS

AS	1829	X	2134	ROLLING SHUTTER.
AS2	1981	X	2134	"
AS3	2134	X	2134	"
D	1064	X	2134	T.W. DOOR.
D1	914	X	2134	"
D3	800	X	2134	"
W	1219	X	1350	T.W GLAZED WINDOW
W1	1829	X	1350	"
V	814	X	610	T.W. GLAZED VENTILATOR.

SPECIFICATIONS :-

FOOTING :-	R.C.C FOOTINGS IN 1:2:4 MIX WITH SUITABLY REINFORCEMENT.
BRICK WORK :-	BRICK WORK IN CM 1:6 MIX AND PLASTERED WITH 1:4 MIX
R.C.C WORKS	R.C.C SLABS, COLUMNS, BEAMS, LINTEL AND STAIRCASE IN 1:2:4 MIX AND SUITABLY REINFORCEMENT.
FLOORING	MOSAIC FLOORING
WEATHERING COURSE	ONE SET OF PRECCED TILES AND LAID OVER A BED OF BRICK JELLY LIME CONC. MIXED WITH CAUDE OIL AND POINTED WITH SAME OIL MIXED MORTER.

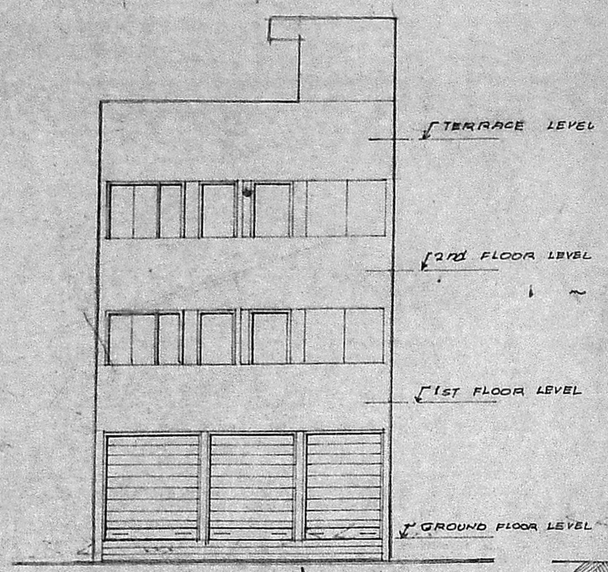

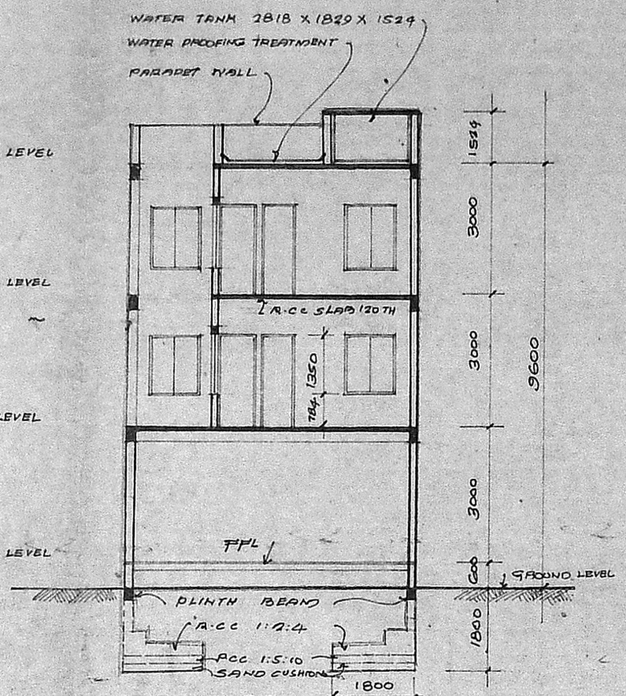

SECTION AA
SCALE 1:100

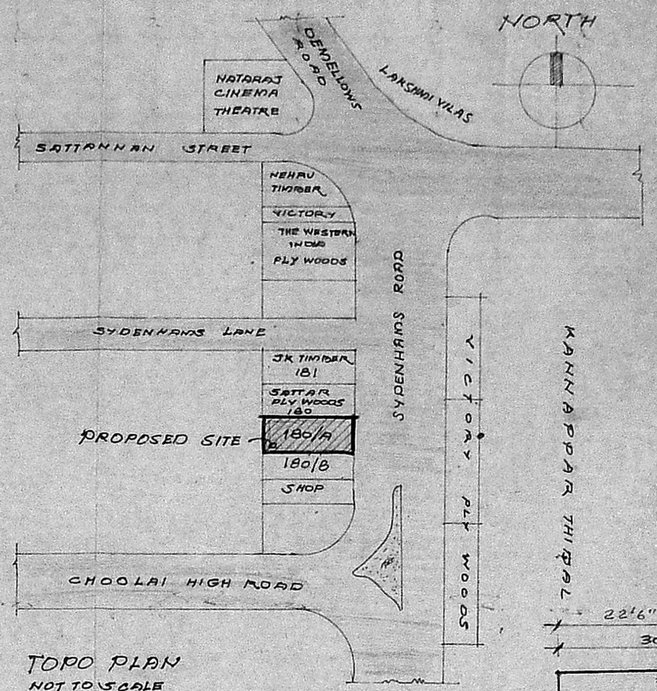

TOPO PLAN
NOT TO SCALE

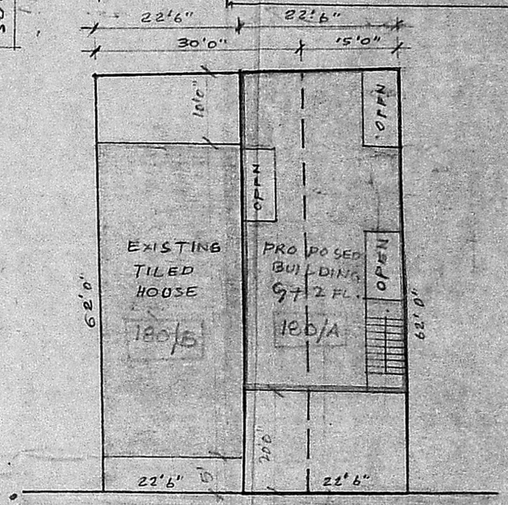

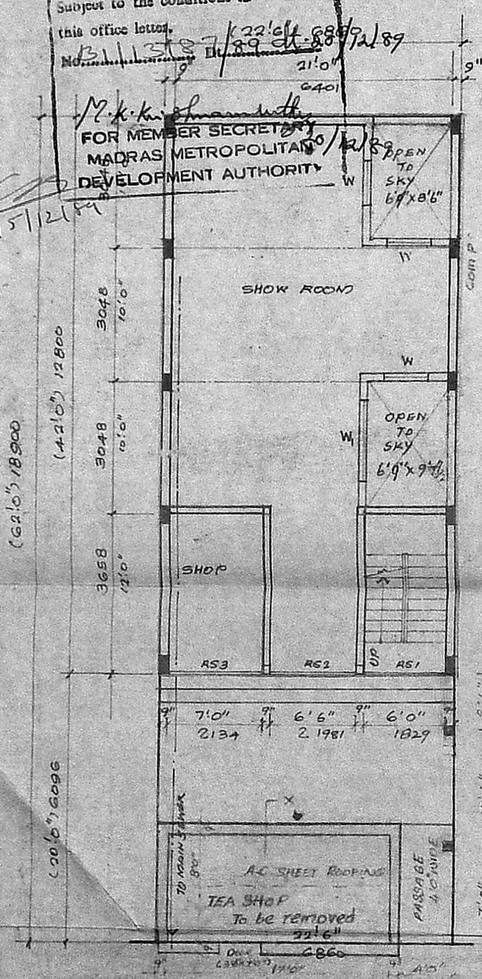

GROUND FLOOR PLAN WITH SITE PLAN.
SCALE 1:100

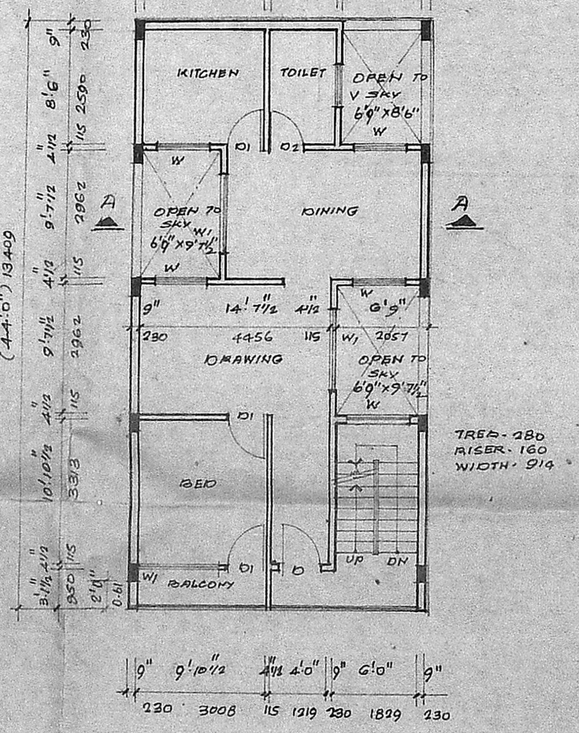

TYPICAL FLOOR PLAN
(FIRST & SECOND FLOOR)
SCALE 1:100

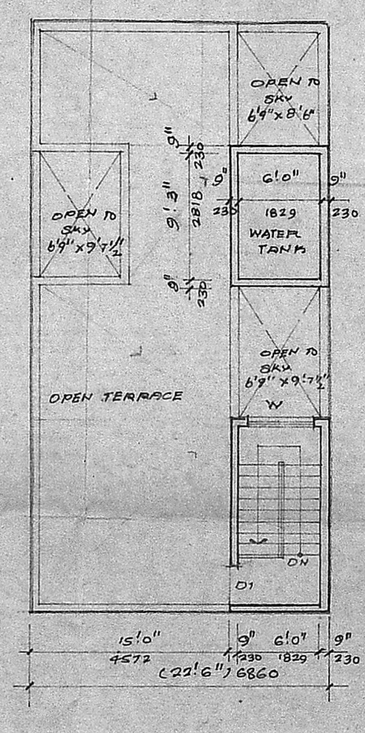

TERRACE FLOOR PLAN
SCALE 1:100

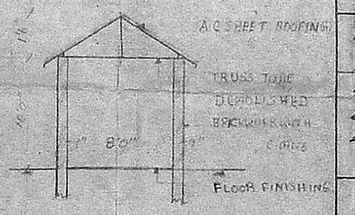

SECTION XX
(To be removed)

RESIDUARY PLOT DETAILS FOR SUB-DIVISION TO BE REGULARISED.

COLOUR CODE REFERENCE

- PROPOSED WORK
- EXISTING ROAD
- SITE BOUNDARY
- TO BE REMOVED

AREA STATEMENT

		Sq. Ft	Sq. M
1	SITE EXTENT :-	1395.00	129.65
2.	GROUND FLOOR :	823.00	76.48
3.	FIRST FLOOR :	803.00	74.62
4	SECOND FLOOR :	803.00	74.62
	TOTAL	2429.00	225.72

SIGNATURE OF OWNER

A. BABU B.E. M.I.E
Consulting Civil Engineer
Licensed Surveyor
Class I No.308
Corporation of Madras
No. 2. Cart Track Street
T. NAGAR MADRAS-17.

PROPOSED BUILDING AT
DOOR NO: 180/A R.S NO: 1319/174
BLOCK NO: 35 SYDENHAMS ROAD
VEPERY MADRAS-7