MMDA/A/PP NO. 1
C.No. A/26154/90
Vol.
Survey
PART I 31/10.
PART II
A.P. D.P.

DPA 720/90 dt 9/11/96.
No 11, D-146
R - 4" ϕ VENTPIPE
RL 20'
Privately

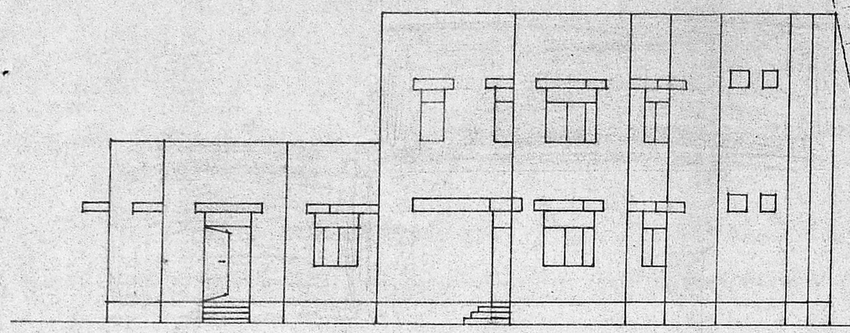

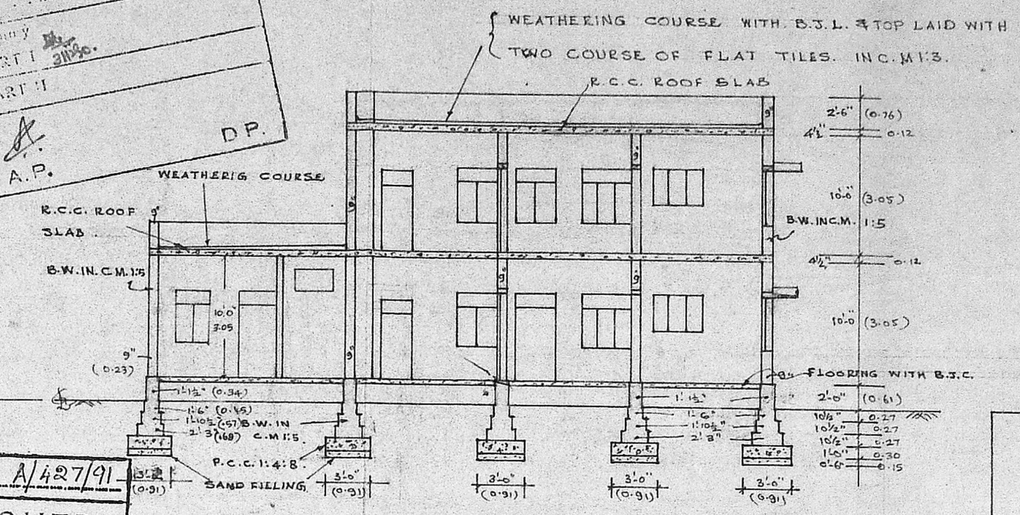

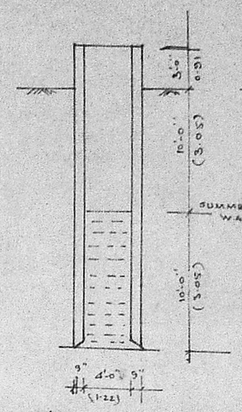

SECTION OF WELL

SECTION OF SEPTIC TANK.



PLAN OF SEPTIC TANK

FRONT ELEVATION

SECTION ON 'AB'

Planning Permit No. A/427/91
APPROVED
SUBJECT TO THE CONDITIONS IN THIS OFFICE LETTER.
No. A/26154/90 Date 12-4-91
for MEMBER SECRETARY
MADRAS METROPOLITAN DEVELOPMENT AUTHORITY
MADRAS - 600 008
11491

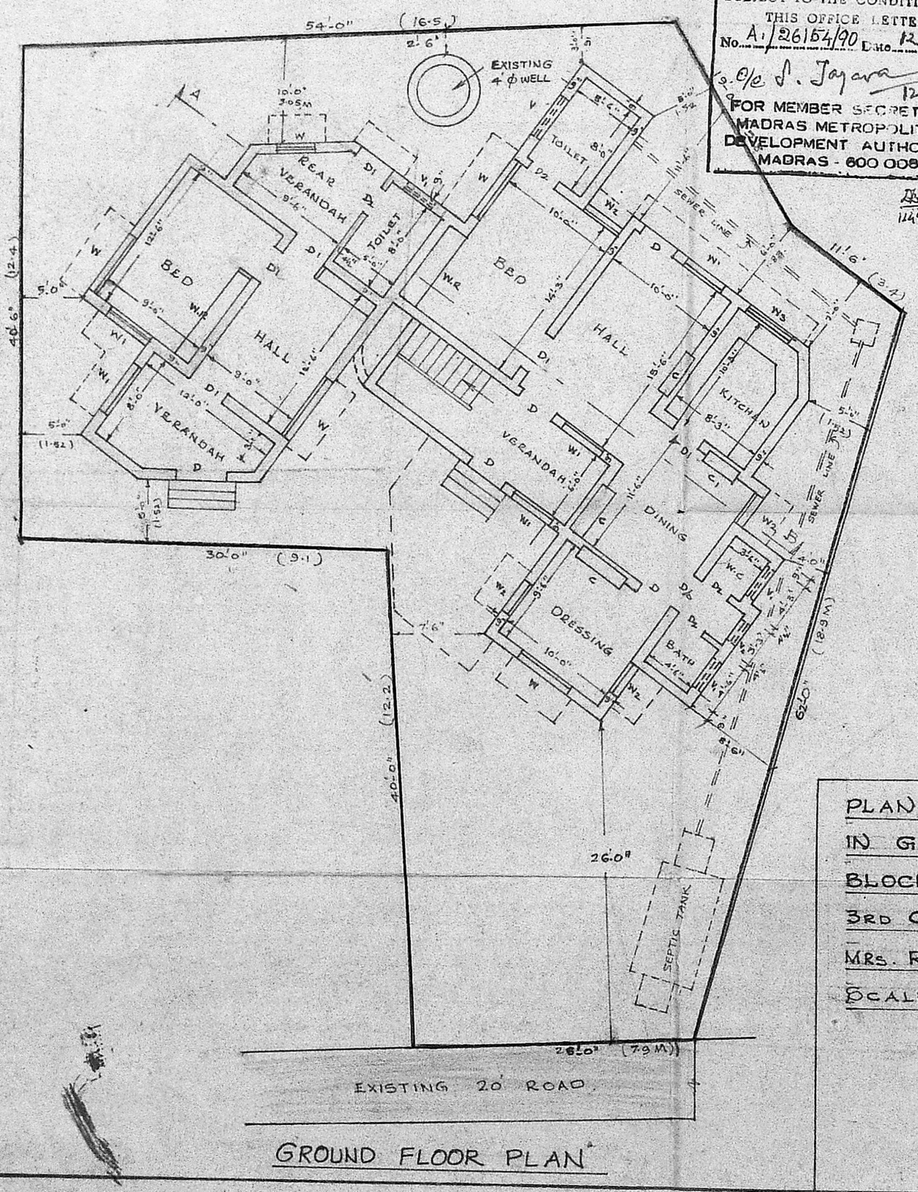

GROUND FLOOR PLAN

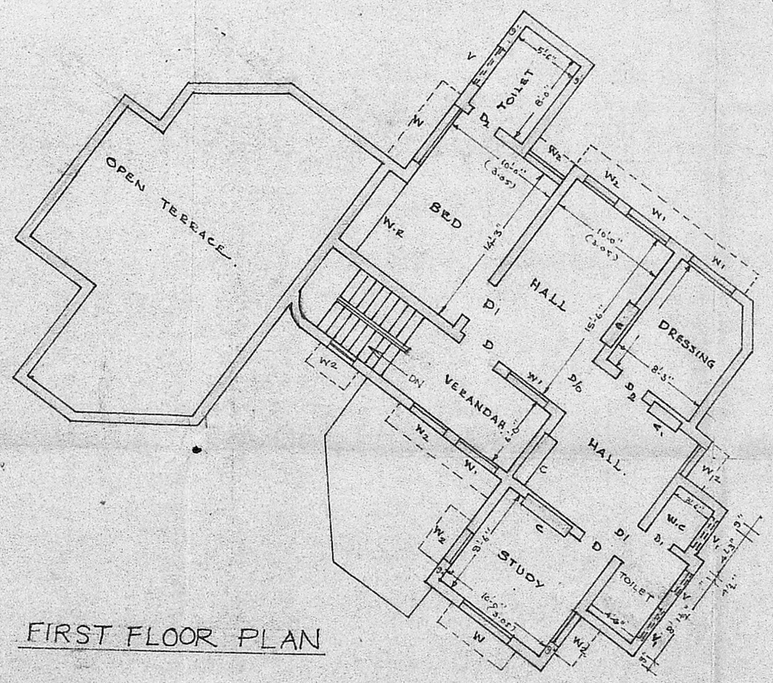

FIRST FLOOR PLAN

PLAN SHOWING THE PROPOSED ADDITIONAL CONSTRUCTION IN GROUND FLOOR AND PROPOSED FIRST FLOOR IN T.S.No. 134/7 BLOCK No. 1. EKKATTU THANGAL DIVISION No. 145. BALAJI NAGAR 3RD CROSS STREET DOOR No. 10 FOR MRS. SAROJA SUBRAMANIAN AND MRS. REVATHY SANKARARAMAN. Dno. 146

SCALE: 8 FEET TO AN INCH. (IN METER)

1 K. Saroja
2 K.S. Revathy
SIGNATURE OF OWNER

R. Mohan Rao, D.C.E
LICENSED SURVEYOR
Corporation of Madras
REG. No: 14
AMBATTUR TOWNSHIP
ALANDUR MUNICIPALITY
Consulting Engineer & Contractors
Office: 16, Madley Road
T. NAGAR, MADRAS-600 017
Phone: 440783
SIGNATURE

KEY PLAN
NOT TO SCALE

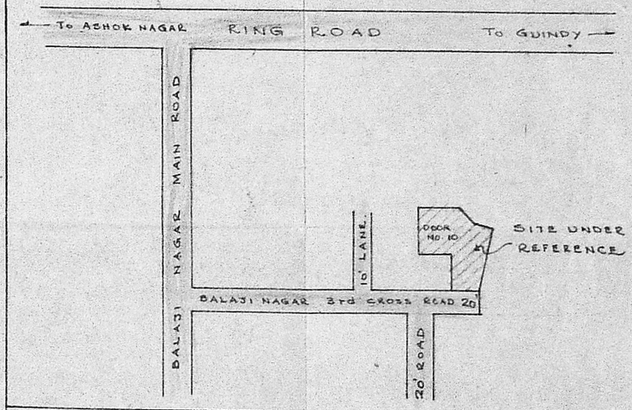

SPECIFICATION OF WORK.

FOUNDATION: P.C.C. 1:4:8. USING 40mm BROKEN STONE JELLY OVER SAND FILLING. AND BRICK WORK FOR FOUNDATION IN C.M 1:5.
SUPERSTRUCTURE: BRICK WORK IN C.M. 1:5, FOR 4½" WALL IN C.M 1:4
ROOF SLAB: R.C.C. 1:2:4 USING 20mm BROKEN STONE JELLY WITH NECESSARY REINFORCEMENT.
WEATHERING COURSE: WITH BRICK JELLY IN LIME CONCRETE AND TOP LAID WITH TWO COURSE OF FLAT TILES IN C.M. 1:3.
FLOORING: WITH BRICK JELLY CEMENT CONCRETE AND TOP LAID WITH SUITABLE MOSAIC TAILS.
PLASTERING: PLASTERING THE CEILING WITH C.M. 1:3 & FOR WALL 1:5
WOOD WORK: ALL WOOD WORK ARE MADE WITH C.W & PAINTED.

REFERENCE:-

D. DOOR	3'-6" x 7'.0"	(1.06 X 2.13)
D1 DOOR	3'.0" x 7'.0"	(0.91 X 2.13)
D2 DOOR	2'-6" x 6'.0"	(0.76 X 1.83)
W WINDOW	5'.0" x 4'.6"	(1.52 X 1.37)
W1 WINDOW	4'.0" x 4'.6"	(1.22 X 1.37)
W2 WINDOW.	3'.0" x 4'.6"	(0.91 X 1.37)
W3 WINDOW.	4'.6" x 3'.0"	(1.37 X 0.91)
D/o DOOR OPEN.	3'.0" x 7'.0"	(0.91 X 2.13)
V. VENTILATOR	4'.0" x 2'.0"	(1.22 X 0.61)
V1 VENTILATOR	3'.0" x 2'.0"	(0.91 X 0.61)
V2 VENTILATOR	2'.6" x 1'.6"	(0.76 X 0.45)
C CUPBOARD.	4'.0" x 7'.0"	(1.22 X 2.13)
C1 CUP BOARD.	3'.0" x 7'.0"	(0.91 X 2.13)
W/R. WARD ROBE.	7'.0" x 7'.0"	(2.13 X 2.13)
EXISTING ROAD.		
SITE BOUNDARY.		
PROPOSED CONSTRUCTION.		
SITE AREA.	3606 sq.Ft. (335 M²)	
CONSTRUCTION AREA. G.F	1512 SqFt (140.46 M²) F.F	1003 SqFt (93.18 M²)