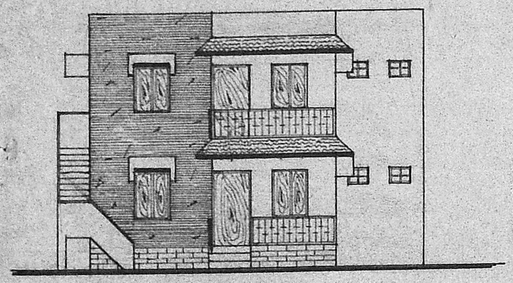

FRONT ELEVATION

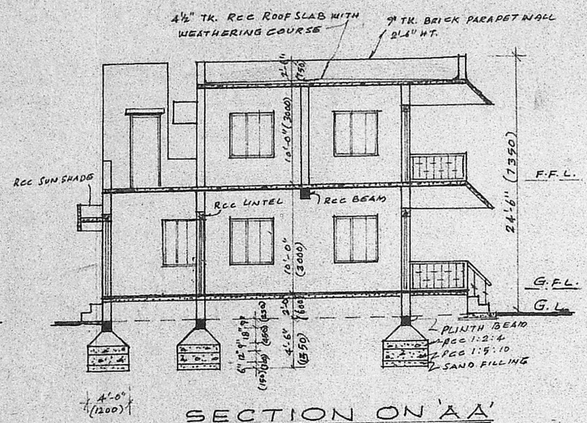

SECTION ON 'AA'

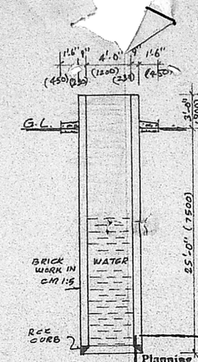

SECTION OF 4'-0" DEEP SEPTIC TANK



TOPO PLAN

NOT TO SCALE

SPECIFICATION

FOUNDATION WITH CC 1:5:10 USING 40 MM JELLY.

BRICK WORK IN FOUNDATION, BASEMENT & SUPERSTRUCTURE WITH 1ST. CLASS STOCK BRICKS IN CM 1:5.

FLOORING WITH CC 1:5:10 FINISHED WITH MOSAIC.

PLASTERING WITH CM 1:5, 12 MM THICK FINISHED WITH 3 COATS OF WHITE OR CORDUR WASHING.

RCC COLUMN, PLINTH BEAM, ROOF BEAM, LINTEL, SUNSHADE WITH CC 1:2:4 USING REQUIRED REINFORCEMENT.

WEATHERING COURSE WITH BRICK JELLY LIME CONC. LAID IN SLOPE AND OVER PRESSED TILES LAID.

ALL WOOD WORK WILL BE OF BEST QUALITY TEAK WOOD.

SCHEDULE OF JOINERY

MD.	MAIN TEAK WOOD DOOR	3'-3" X 7'-0"	(1000 X 2100)
D.	" "	3'-0" X 7'-0"	(900 X 2100)
D1.	" "	2'-6" X 7'-0"	(750 X 2100)
W.	TEAK WOO WINDOW	4'-0" X 4'-6"	(1200 X 1350)
W1.	" "	3'-0" X 4'-6"	(900 X 1350)
V.	RCC VENTILATOR	2'-0" X 1'-6"	(600 X 450)

COLOUR REFER.

- PROPOSED BUILDING
- ROAD
- SITE BOUNDRY
- SEWERAGE

PLINTH AREA

	SQ.FT.	SQ.MT.
PLOT AREA	2325	216
GROUND FLOOR PLINTH AREA	725	67.4
FIRST FLOOR PLINTH AREA	565	52.5

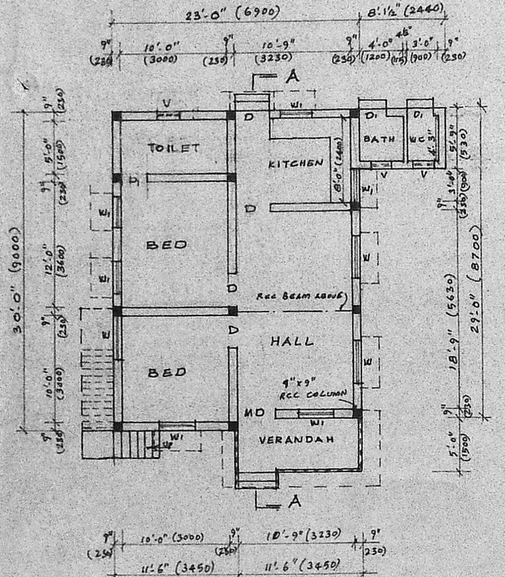

GROUND FLOOR PLAN

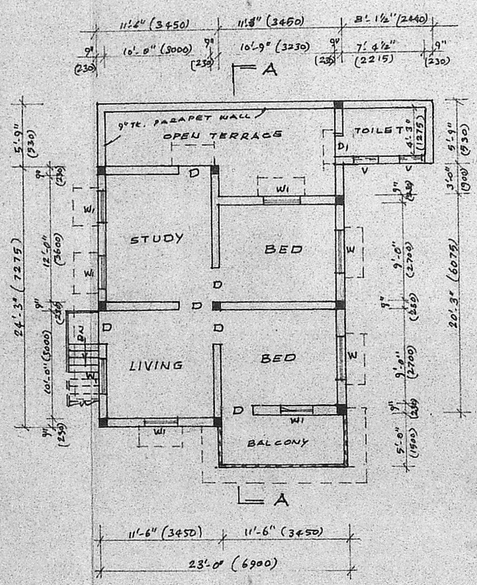

FIRST FLOOR PLAN

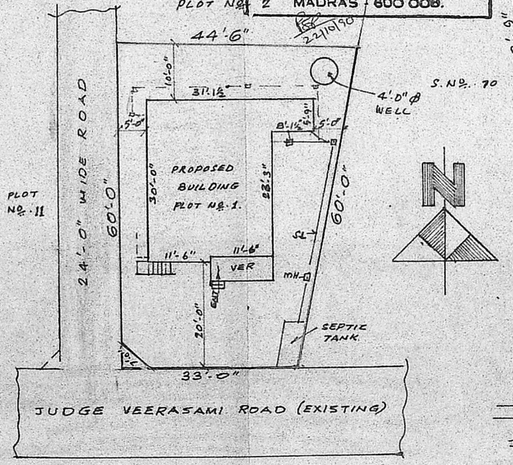

SITE PLAN

SCALE 1" = 16'-0" (1:200)

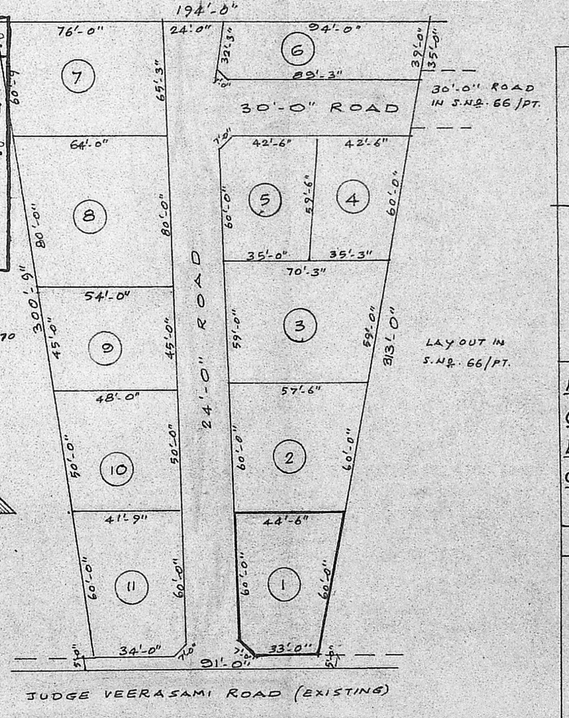

LAY-OUT PLAN

SCALE 1" = 33'-0" (1:400)

PLAN SHOWING THE PROPOSED CONSTRUCTION OF RESIDENCE BUILDING IN PLOT No. 1, S.No. 70/PART OF PERUNGUDI VILLAGE No. 143, SAIDAPET TALUK, CHENGALPUT DISTRICT.

SCALE 1" = 8'-0" (1:100)

Planning Permit No. A/1383/90

APPROVED

SUBJECT TO THE CONDITIONS IN THIS OFFICE LETTER.

No. A2/18144/90 Date 24-10-90

O/C C.R. Unnialp 24/10/90

FOR MEMBER SECRETARY
MADRAS METROPOLITAN DEVELOPMENT AUTHORITY
2 MADRAS : 600 008.

J.S. ARIVAZHAGAN, B.E.,
Licensed Surveyor.
PERUNGUDI TOWN PANCHAYAT.
Consulting Engineer & Contractor
Res: No. 6, Thirumalai Nagar,
PERUNGUDI, MADRAS-96.

OWNER

LICENSED SURVEYOR