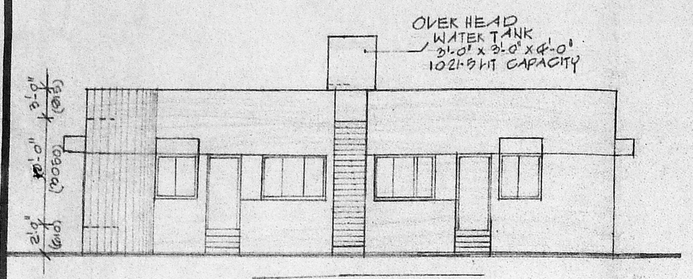

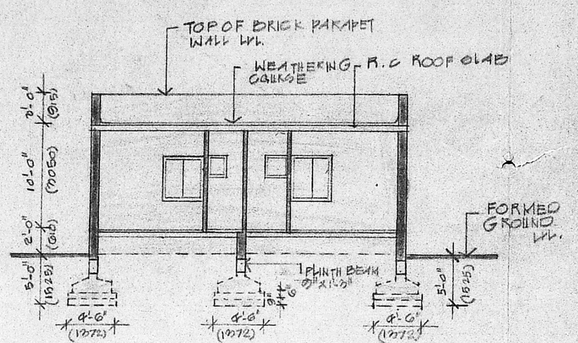

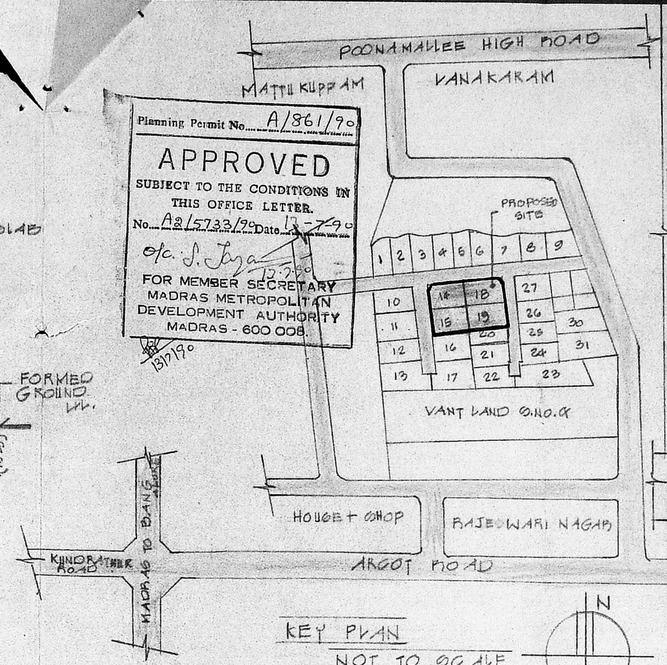

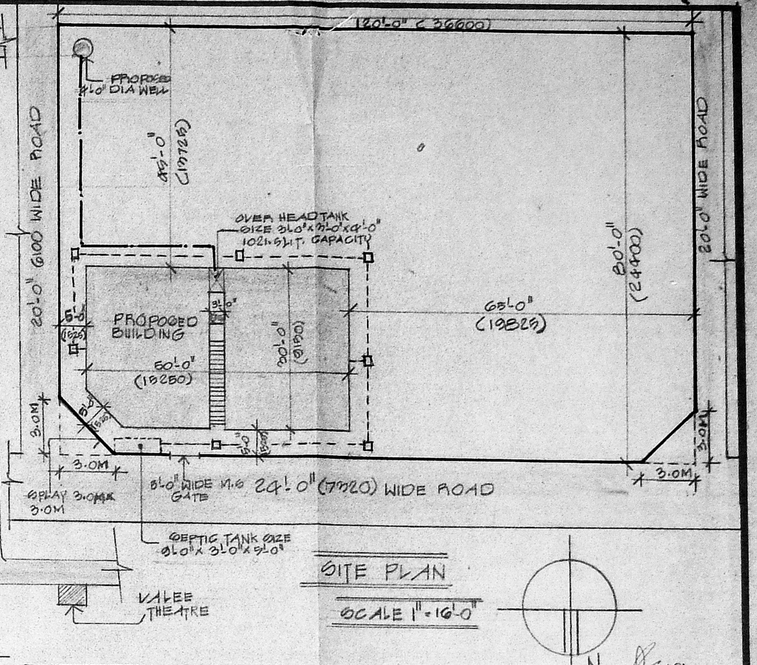

COLOUR INDEX

- PROPOSED BUILDING
- ROAD
- BOUNDARY LINE
- WATER LINE
- SEWAGE LINE

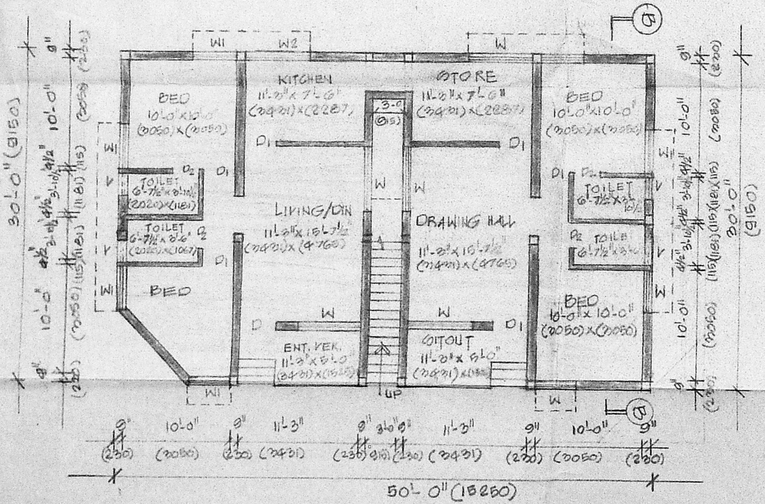

GROUND FLOOR PLAN

SPECIFICATION

FOUNDATION:- USING R.C.C 1:2:4 IN FOOTING AND PLINTH BEAM. P.C.C 1:4:8 6" DEPTH AND FILLING 9" DEPTH.

SUPER STRUCTURE:- BRICK WORK IN C.M 1:5 R.C.C 1:2:4 FOR LINTEL BEAM AND SLAB

ROOF SLAB:- R.C.C 1:2:4 SLAB TK. 4" (100)

FINISHES:- INTERIOR PAINTED WITH CEMENT PAINT AND EXTERIOR PAINTED WITH CEMENT PAINT.

FLOORING:- MOSAIC FLOORING

JOINERY:- BEST INDIAN COUNTRY WOOD

WEATHERING COURSE:- BRICK JELLY LIME CONCRETE OVER THE WEATHERING TILES.

SCHEDULE OF JOINERY DOORS WINDOWS AND VENT.

TYPE	BRICK OPENING SIZE WIDTH	BRICK OPENING SIZE HEIGHT	DESCRIPTION
D	3'-3" (991)	7'-0" (2130)	T.W. FRAMED DOUBLE DOOR. DOOR TO DETAIL.
D1	3'-0" (915)	7'-0" (2130)	COUNTRY WOOD FRAMED FLUSH DOOR TO DET.
D2	2'-6" (760)	7'-0" (2130)	COUNTRY WOOD FRAMED MARINE PLY PANELLED DOOR TO DETAIL
W	6'-0" (1830)	4'-6" (1372)	COUNTRY WOOD FRAMED WINDOW WITH 2 EQ. SIDE HUNG SHUTTER TO DETAIL.
W1	4'-0" (1220)	4'-6" (1372)	COUNTRY WOOD FRAMED WINDOW WITH 2 EQ SIDE HUNG SHUTTER TO DETAIL.
W2	6'-0" (1830)	3'-6" (1067)	COUNTRY WOOD FRAMED WINDOW WITH 2 EQ SIDE HUNG SHUTTER TO DETAIL
V	2'-0" (610)	2'-0" (610)	COUNTRY WOOD FRAMED VENTILATORS WITH FROSTED GLASS LOUVERS WITH M.S ROD TO DET.

AREA STATEMENT

PLOT AREA — 9600.0 SQ.FT (892.19 M²)

PLINTH AREA IN GROUND FLOOR — 1308.5 SQ.FT (121.97 M²)

A2/5733/90

Boundary plan 3.5.90

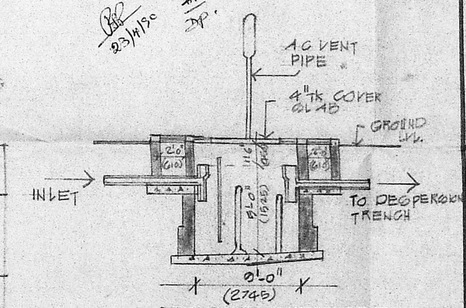

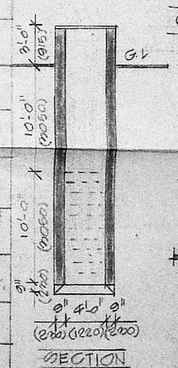



L. Rajeswari
OWNER'S SIGNATURE

PROPOSED RESIDENCE FOR MRS R. RAJESWARI AT PLOT NO. S.NO 5/1, 5/2, MOTHI NAGAR KARAMBAKKAM VILLAGE SAIDAPET TALUK CHINGLEPUT DISTRICT.

SCALE 1" = 8'-0" | DATE 30.1.90

R. Mohan Rao, D.C.E
LICENSED SURVEYOR
Corporation of Madras
REG. No: 14
AMBATTUR TOWN SHIP
ALANDUR MUNICIPALITY
Consulting Engineer & Contractors
Office: 15, Madley Road
T. NAGAR, MADRAS-600 017
Phone: 440784

LICENCED SURVEYOR