Planning Permit No. C/PP/231/71
APPROVED
SUBJECT TO THE CONDITIONS IN THE OFFICE LETTER
No. 22836 Date 31.1.74
FOR MEMBER SECRETARY
MADRAS METROPOLITAN DEVELOPMENT AUTHORITY
MADRAS-600 008.
C/L/22836/73
8/311
Sanitary Officer

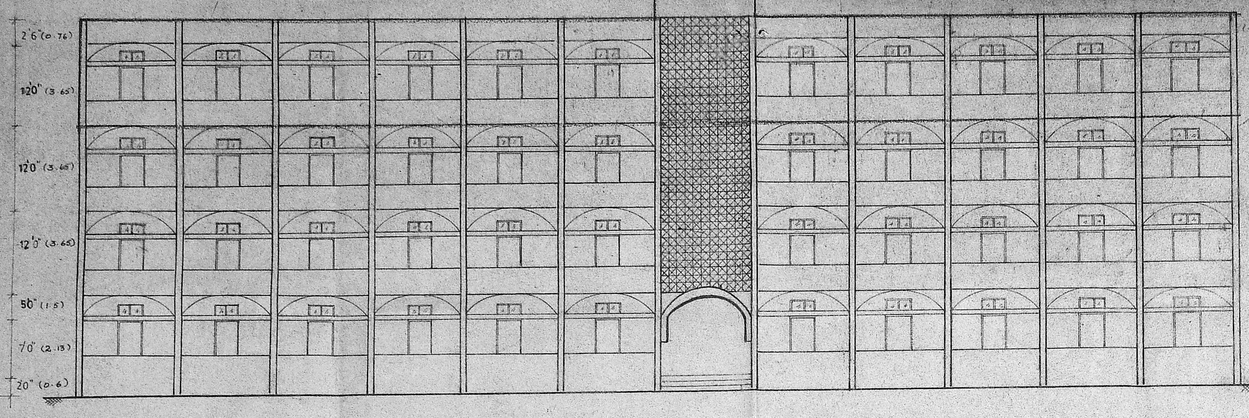

Front Elevation

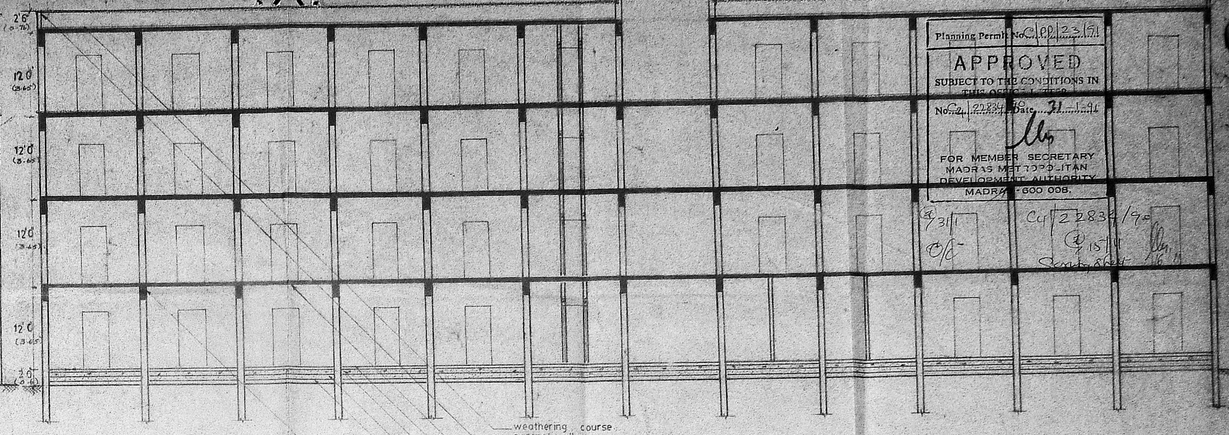

Section On a.a

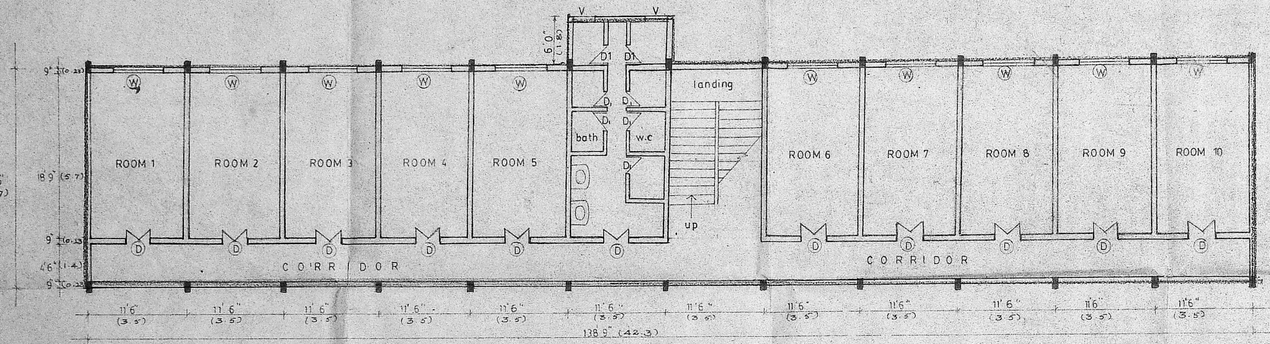

Proposed Third Floor Plan

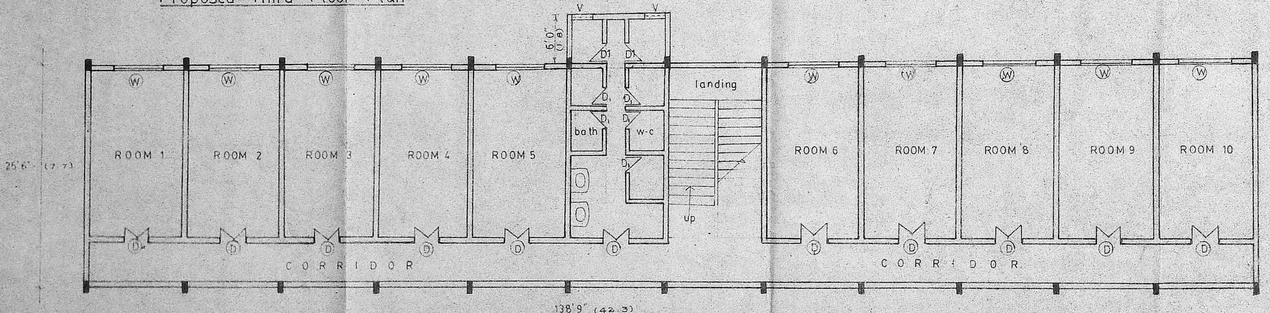

Typical Plan For First & Second Floor

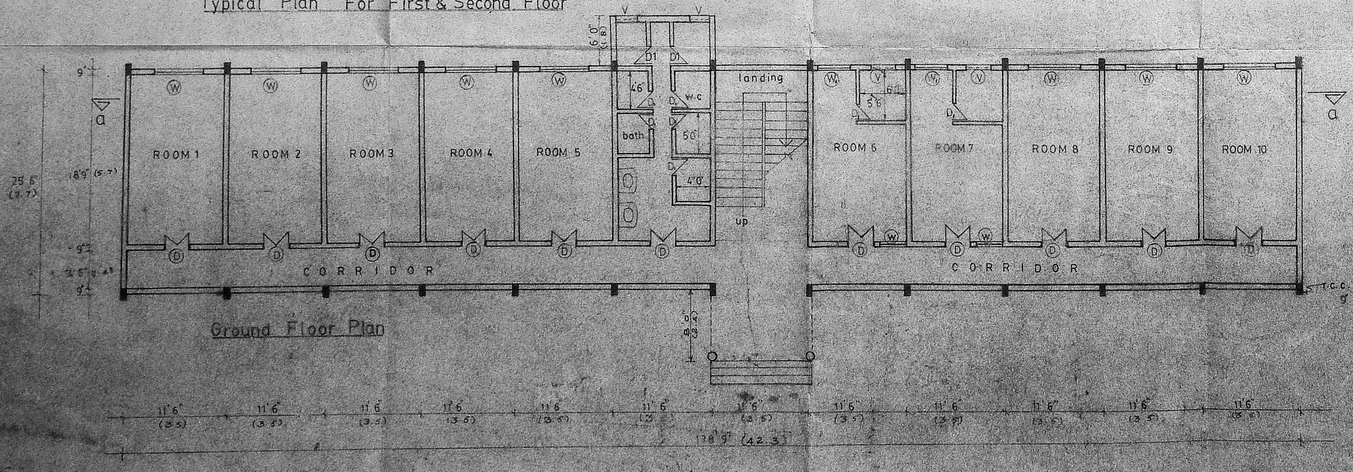

Ground Floor Plan



foundation details
(not to scale)

AREA SCHEDULE Site area : 43598.0 s.ft. 4050.40 s.m

CHAPEL & DINING HALL		
Ground floor	2543.75 s.ft.	236.32 s.m
First floor	3606.85 s.ft.	335.10 s.m
	6150.60 s.ft.	571.42 s.m
ADMINISTRATION BLOCK		
Ground floor	3887.05 s.ft.	361.12 s.m
First floor	3887.05 s.ft.	361.12 s.m
	7774.10 s.ft.	722.24 s.m
PRINCIPAL'S RESIDENCE		
Ground floor	1051.04 s.ft.	97.65 s.m
DEAN'S RESIDENCE		
Ground floor	1051.04 s.ft.	97.65 s.m

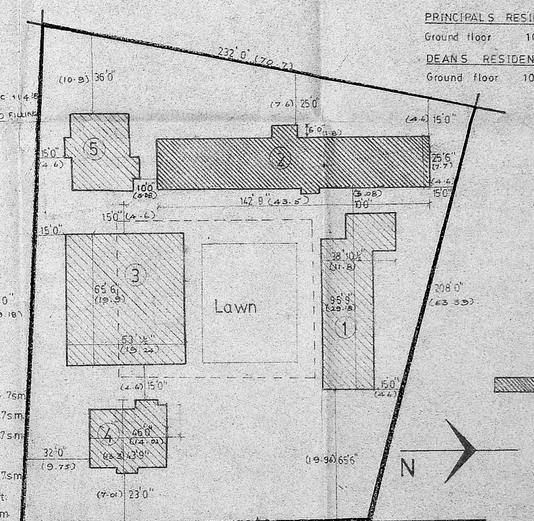

1. chapel & dining hall
2. students hostel
3. administration block
4. principals residence
5. deans residence

STUDENTS HOSTEL
area schedule

EXISTING BUILDING
GROUND FLOOR : 3538.13 s.ft. 328.7 s.m
FIRST FLOOR : 3538.13 s.ft. 328.7 s.m
SECOND FLOOR : 3538.13 s.ft. 328.7 s.m
PROPOSED BUILDING
THIRD FLOOR : 3538.13 s.ft. 328.7 s.m
TOTAL FLOOR AREA 14152.52 s.ft. 1314.80 s.m

proposed addition to third floor

scale 1"=30'0"

REFERENCE
EXISTING SHOWN
PROPOSAL SHOWN
BOUNDARY SHOWN
ROAD SHOWN

Lay Out Plan

PROPOSED ADDITIONS TO BUILDINGS FOR M.B.S

no: 5 waddells road, kilpauk madras 10. block no 52.
r.s. no: 3129/2, division no 64.

STUDENTS HOSTEL

SCALE 1"=8'0"

The Principal
MADRAS BIBLE SEMINARY,
No. 13-24, Waddell Road,
KILPAUK, MADRAS-600 010. INDIA.

schedule of joinery

D	Door	3'0" x 7'0" (0.9 X 2.1)
D1	Door	2'6" x 7'0" (0.7 X 2.1)
W	Window	6'0" x 4'6" (1.8 X 1.4)
W1	Window	4'0" x 2'6" (1.2 X 1.4)
V	Ventilator	3'0" x 2'0" (0.9 X 0.7)

LICENSED SURVEYOR

A. C. RAJAN
LICENSED SURVEYOR
R.A. 163
MADRAS

a.c. rajan, b.arch., m.i.a.s.v., a.i.i.p
18, varadarajulu road,
egmore, madras-8

SPECIFICATION

SAND FILLING 6" FOR FOUNDATION AND P.C.C WILL BE IN 1:4:8 RATIO. ALL THE MASONRY WORKS AND MASONRY PLASTERING ARE IN C.M 1:5. ALL THE R.C.C WORKS ARE IN MIX 1:2:4. ALL THE WOOD WORKS ARE IN FIRST CLASS COUNTRY WOOD.