

RAIN WATER HARVESTING

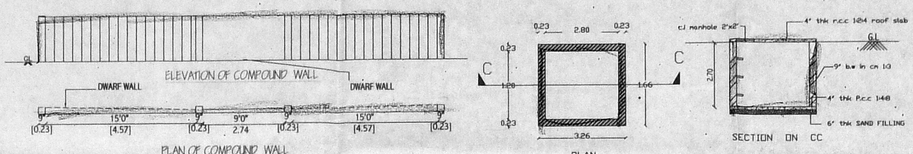

SUMP DETAILS
FOR RAIN WATER HARVESTING

OFFICE COPY



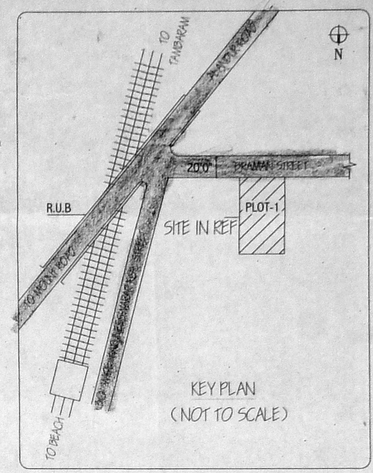

PLAN SHOWING THE PROPOSED
RESIDENTIAL BUILDING AT DOOR NO. 5
PLOT NO. 1, KAMESWARA KOIL STREET,
SAIDAPET, CHENNAI - 600 015.
S.NO: 62 P3 & 67 (P) OF SAIDAPET VILLAGE
BLOCK NO. 32
CORP. DIV. NO. A.P. 135 ZONE IX
SUB. DN. APPROVED NO. D9/50/104/2004

CMDA NOC No. A2/866/06 dated 11.6.06

SPECIFICATION:

1. R.C.C Column Footing And Piles In Foundation.
2. Columns And Piles Are Connected By Plinth Beams.
3. Mosaic Flooring / Spartek Flooring .
4. Brick Work In Basement And Super Structure In C.M.1:5.
5. Walls Are Plastered By Cement Morter In C.M 1:4 Mix
6. Joinery Work In Teak And Country Wood.
7. Lintel Over Opening.
8. Roof Covered By R.C.C Slab.
9. All R.C.C. Work In Cement Concrete 1:2:4.
10. Weathering Course Laid With Proper Slope Over R.C.C.Slab.

SCHEDULE OF JOINERY:

MAIN DOOR	MD	3'3"x7'0"	1.00x2.13
DOOR	D1	3'0"x7'0"	0.91x2.13
DOOR	D2	2'6"x7'0"	0.76x2.13
KITCHEN WINDOW	KW	3'0"x3'0"	0.91x0.91
WINDOW	W	4'6"x4'6"	1.37x1.37
WINDOW	W1	4'0"x4'6"	1.21x1.37
VENTILATOR	V	2'0"x1'6	0.61x0.45

AREA STATEMENT	SQ.FT	SQ.M
PLOT AREA	2855.00	265.31
GROUND FLOOR	1059.00	96.52
FIRST FLOOR	1817.00	168.8
SECOND FLOOR	965.00	89.65
TOTAL	5821.00	554.95
PLOT COVERAGE	64.01%	
F.S.I	1.56	

COLOUR INDEX :

PROPOSED WORK
ROAD
BOUNDARY

SCALE:- 1"=8'0"

Applicant's signature

C. K. RATNASABAPATHY
ENGINEER
Licensed Surveyor
Class I No. 2-512
CORPORATION OF MADRAS
No. 7, Jubilee Road,
West Mambalam,
MADRAS-600 033

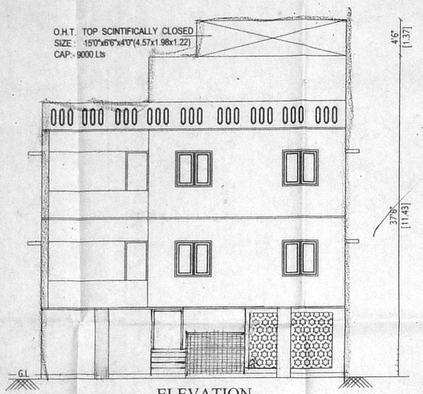

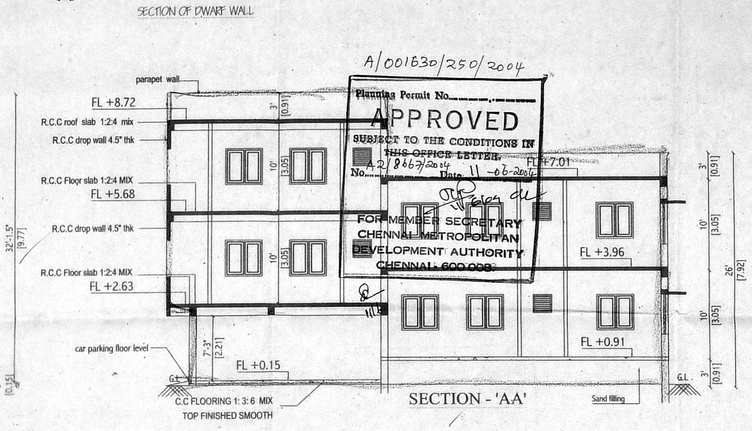
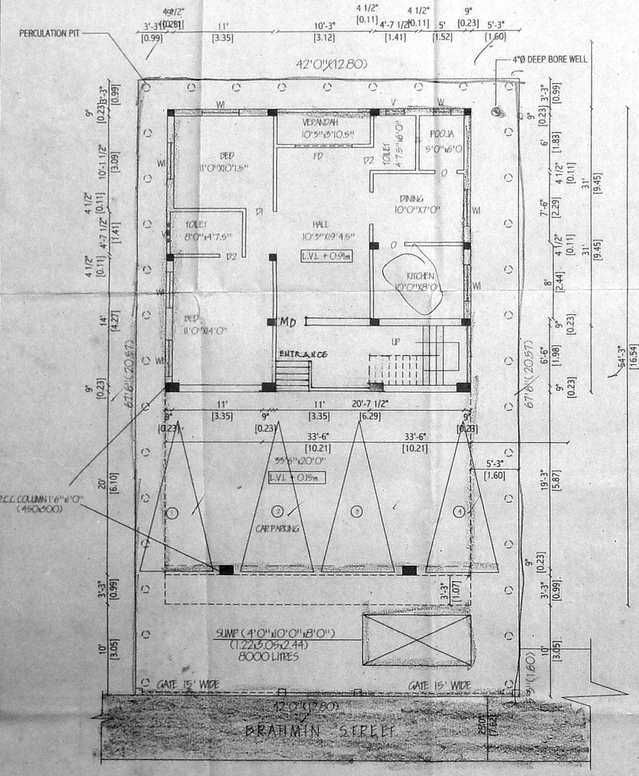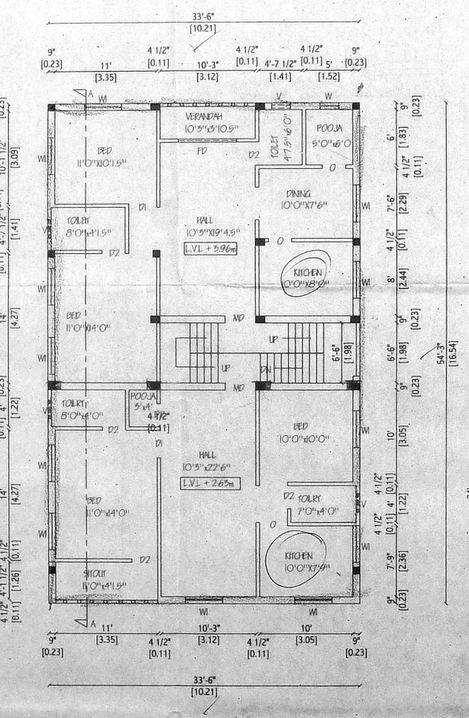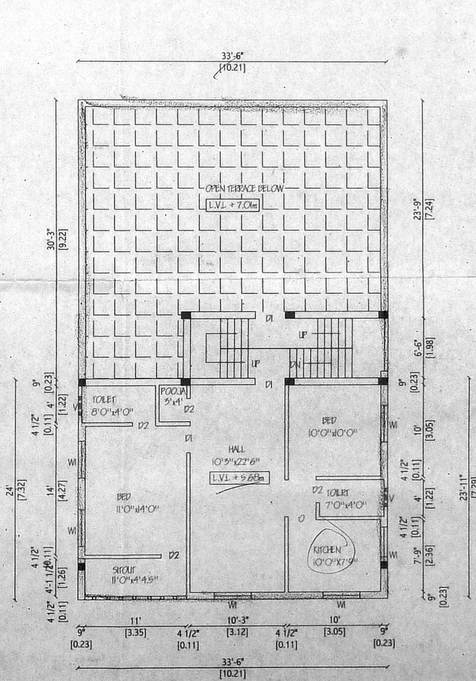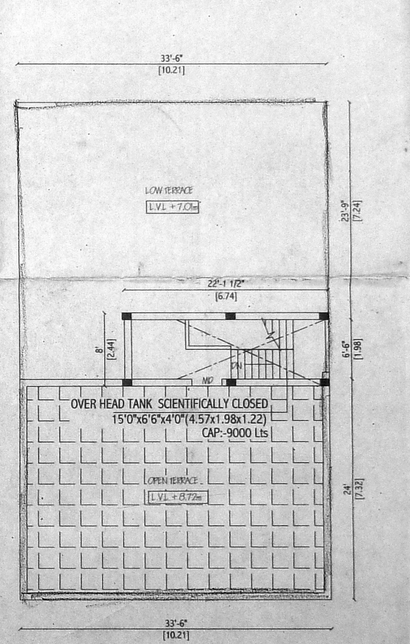
A/001630/250/2004
Planning Permit No.
APPROVED
SUBJECT TO THE CONDITIONS IN
THIS OFFICE LETTER.
No. A2/866/2006 Dt. 11-06-2006
FOR MEMBER SECRETARY
CHENNAI METROPOLITAN
DEVELOPMENT AUTHORITY
CHENNAI-600 008.