TOTAL EXTEN ROAD AREA

PUBLIC PURPC PP-1 HANDED OVER TO THE PP-2 HANDED OVER TO THE

NO. OF PLOTS

NOTE:

1. SPLAY - 1.5M x 1.5M 3. C ROAD AREA **PUBLIC PURPOSE-1 PUBLIC PURPOSE-2** (RESERVED FOR TANGEDCO)



AUTHORITY (LOCAL BODY) floor and as well as dewatering arrangements during flood periods.

certificate only after compliance certificate from WRD. of work,

site boundaries.

(II) TNCDBR-2019 RULE NO: 47 (8) IN G.O.(Ms) No.18, MAWS DEPARTMENT DATED 04.02.2019 & AMENDMENTS APPROVED IN G.O.Ms.No.16, MAWS (MAI) DEPARTMENT DATED 31.01.2020 AND PUBLISHED IN TNGG ISSUE No.41.DATED 31.01.2020

ONE PERCENT OF LAYOUT AREA EXCLUDING ROAD, ADDITIONALLY, SHALL BE RESERVED FOR "PUBLIC PURPOSE". WITHIN THE ABOVE CEILING 0.5% OF AREA SHALL BE TRANSFERRED TO THE LOCAL BODY AND 0.5% OF AREA SHALL BE TRANSFERRED TO THE TANGEDCO OR TO THE LOCAL BODY FREE OF COST THROUGH A **REGISTERED GIFT DEED BEFORE THE ACTUAL SANCTION OF THE LAYOUT.**

(III) TNCDBR-2019, RULE NO: 47 (11) THE COST OF LAYING IMPROVEMENTS TO THE SYSTEMS IN RESPECT OF ROAD, WATER SUPPLY, SEWERAGE, DRAINAGE OR ELECTRIC POWER SUPPLY THAT MAY BE REQUIRED AS ASSESSED BY THE CONCERNED AUTHORITY, NAMELY, THE LOCAL BODY AND TAMIL NADU ELECTRICITY BOARD, SHALL BE BORNE BY THE APPLICANT.

(IV) LOCAL BODY SHOULD ENSURE COMPLIANCE OF ALL THE CONDITIONS STIPULATED BY PWD IN THEIR LETTER NO.DB/T5(3) / F- NOC - 4575 NANDIYAMBAKKAM VILLAGE / 2022 / DATED: 13.06.2022, AND SHALL OBTAIN A LETTER FROM PWD CONFIRMING THE COMPLIANCE OF THE CONDITIONS BEFORE THE SANCTION AND **RELEASE OF THE LAYOUT.**


LEGEND:

SITE BOUNDARY
ROAD GIFTED TO
EXISTING ROAD
PUBLIC PURPOSE-
PUBLIC PURPOSE
WATER BODY

MINJUR PANCHAYAT UNION

LAYOUT OF HOUSE SITES IN S.Nos. 29/1 & 29/2A OF NANDIYAMBAKKAM VILLAGE.

SCALE : 1:800 (ALL MEASUREMENTS ARE IN METRE)

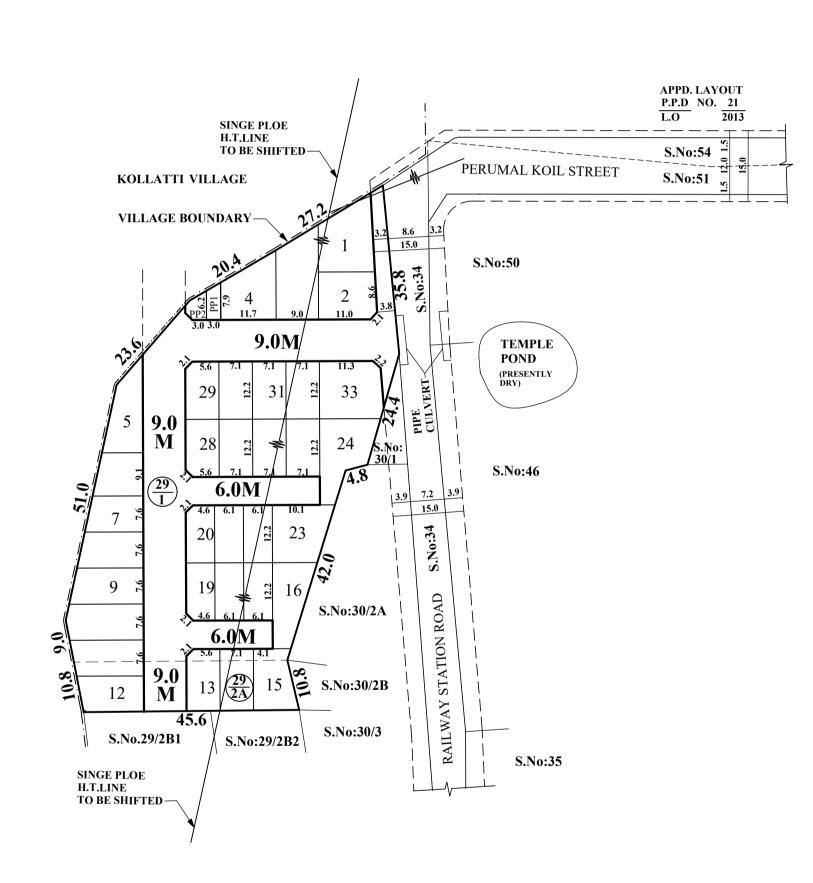

	•	4937 SQ.M
(AS PER DOCUMENT)	•	4937 SQ.WI
	•	1520 SQ.M
DSE AREA (1%) LOCAL BODY $(0.5\%) = 21.0 \text{ SQ.M}$:	42 SQ.M
TANGEDCO $(0.5\%) = 21.0 \text{ SQ.M}$:	33 Nos.

2. MEASUREMENTS ARE INDICATED EXCLUDING SPLAY DIMENSIONS

WERE HANDED OVER TO THE LOCAL BODY VIDE GIFT DEED DOC.NO:1596/2022, DATED:28.02.2022 @ SRO, THIRUVOTTIYUR.

(I)THE APPLICANT SHOULD FOLLOW THE CONDITIONS MENTIONED BY THE CE, PWD/WRD, CHENNAI REGION, CHEPAUK, CHENNAI-5 IN LETTER NO.DB/T5(3) /F - NOC-4575 NANDIYAMBAKKAM VILLAGE / 2022 / 13.06.2022, WHICH ARE TO BE COMPLIED BY THE APPLICANT BEFORE ISSUING OF THE LAYOUT APPROVAL BY THE COMPETENT

1. The applicants' land should be filled with earth filling with proper compaction to the minimum Level of (+)4.160 m [i.e. 1.200 m above the Crest level of weir from Neidavoyal Small tank which is (+) 2.960m] to protect the site from inundation during floods. The process of earth filling and compaction should be done in layers of not more than 0.30 metre depth to achieve required degree of compaction for the depth varying from 0.710 to 0.800m depending upon the existing field levels. Also, the applicants should provide emergency pumping operation for the seepage water, if it is proposed to have basement

2. The all round pavement level within the site should not be less than (+)4 160 m. The applicants should prepare the layout proposal by considering the suitable internal storm water drainage network as Micro drain of suitable size within the site as per site condition and the same should be connected to the local drain/channel, rainwater harvesting and sewerage treatment plant and its disposal and garbages/ debris and other solid waste management as per norms in existence within the applicants' land according to existing rules in force and should get proper approval from competent authority without fail.

The sewage or any unhygienic drainage (Treated or Untreated) should not be let into drain /channel/course at any cost and the debris and other materials should not be dumped into the drain/surplus course obstructing free flow of water. The applicants should make drainage network, at their own cost and the same is to be connected to natural storm water drainage/channel.

3. The necessary setback distance should be provided with in the site the as per the norms in existence and as per the rules in force of CMDA (Circular issued by the office of the Commissioner of Town & Country Planning, Chennai-2 vide Roc. No. 4367/2019 BA2/ 13.03.2019) during development and there should not be any construction activities in the setback areas. The CMDA should issue the completion

4. The applicants should clearly demarcate the boundary of their land before the commencement of any developmental activities in the presence of Revenue authorities. The applicants should also maintain the measurement of the site without any encroachments and should maintain as per Revenue records (FMB)

5. The applicants should abide by the rules and regulation of the WRD from time to time. The applicants should also abide court of law of both State & Central Government from time to time.

6. The permission granted to the applicants, should not be altered/modified/ changed to any others. Based on the records submitted by the applicants, the permission is granted. If any documents seem to be fake/manipulated/fabricated, in future the above permission will be cancelled without any correspondence Hence, the applicants are solely responsible of genuinety of the documents submitted.

7. The WRD officers should be allowed to inspect the site at any time, during execution and thereafter, if necessary. Advance intimation should be given to the WRD officers concerned before commencement

8. The applicants should get clearance certificate for their site from the Revenue department to make sure that the site is not an encroached property from the water body as well as confirming this proposed

9. WRD is giving opinion only in connection with the inundation aspect and does not deliver any rights to the applicants to encroach the WRD / Government Lands / Channel. 10. The sewage water from the applicants' land should not let into the drain and for the disposal of the sewage water, suitable arrangements should be made for the same by the applicants, and as well as the construction materials/debris/garbages should not be dumped into the channel/river at any cost.

At any cost, sewage/sullage should not be let into river, and the garbage. debris and construction materials should not be dumped into the channel/river restricting the free flow of water. The trueness of the document received from the applicants in respect to the ownership is purely of applicants' responsibility and it is only for reference purpose to this department. The legal validity of this

document should be verified by the Development / Revenue authorities. The specific remarks on inundation are purely issued on technical grounds in respect to the physical location of land. Failing to comply with any of the above conditions, WRD reserves rights to withdraw the Technical opinion along with NOC on inundation point of view for the above proposed site and in event, the

applicants shall not be eligible for any compensation whatsoever and as well as legal entity.

LOCAL BODY

C-1 GIFTED TO LOCAL BODY **C-2 GIFTED TO TANGEDCO**

CONDITIONS:

THE LAYOUT APPROVED IS VALID SUBJECT **TO OBTAINING SANCTION FROM THE LOCAL BODY CONCERNED.**

<u>P.P.D</u> L.O	NO :	<u>99</u> 2022			
APPROVED					
VIDE LETTER N	O :	L1 / 0123 / 2021			
DATE	:	08 / 08 / 2022			

OFFICE COPY

FOR SENIOR PLANNER (LAYOUT) CHENNAI METROPOLITAN **DEVELOPMENT AUTHORITY**

