

SITE EXTENT (AS PER DOCUMENT) : **5140 SQ.M**
ROAD AREA : **1595 SQ.M**
PUBLIC PURPOSE PROVIDED (1%) : **36 SQ.M**
PP-1 HANDED OVER TO THE LOCAL BODY (0.5%) = 18.0 Sq.m
PP-2 HANDED OVER TO THE TANGEDCO (0.5%) = 18.0 Sq.m
NO. OF PLOTS : **29 Nos**
CONVENIENCE SHOP SITE : **1 No**

NOTE:

- SPLAY - 1.5M x 1.5M, 3.0M x 3.0M
- MEASUREMENTS ARE INDICATED EXCLUDING SPLAY DIMENSIONS
- | | | |
|--|--|---|
| | ROAD AREA | } WERE HANDED OVER TO THE LOCAL BODY VIDE GIFT DEED
DOC.NO:7676/2023,DATED:09.05.2023 @ SRO,SELAIYUR . |
| | PUBLIC PURPOSE-1 (0.5%) | |
| | PUBLIC PURPOSE-2 (0.5%)
(RESERVED FOR TANGEDCO) | |

CONDITIONS:

(I)THE APPLICANT SHOULD FOLLOW THE CONDITIONS MENTIONED BY THE CE, PWD/WRD, CHENNAI REGION, CHEPAUK, CHENNAI-5 IN LETTER NO.DB/T5(3)/F- NOC 02040 ARASANKALANI VILLAGE02832 / 2023 / DATED. 27.04.2023, WHICH ARE TO BE COMPLIED BY THE APPLICANT BEFORE ISSUING OF THE LAYOUT APPROVAL BY THE COMPETENT AUTHORITY (LOCAL BODY)


- The applicants' land should be filled with earth filling with proper compaction to the minimum level of (+)5.000m (i.e.) 0 900m below the Top level of Retaining wall of Ottiyambakkam Odai (+)5.900m.To protect the site from inundation during floods. The process of earth filling and compaction should be done in layers of not more than 0.30 metre depth to achieve required degree of compaction for the depth from (+)1.020m to (+)1.160m depending upon the existing field levels. Also, the applicants should provide emergency pumping operation for the seepage water, if it is proposed to have basement floor and as well as dewatering arrangements during flood periods.
- The all round pavement level within the site should not be less than (+)5.000m. The applicants should prepare the layout proposal by considering the suitable internal storm water drainage network drain as micro drains (i.e.) the peripheral drain size not less than the 0.60m x 0.90m with bed level (+)4.100m and lateral drain of suitable size within the site as per site condition. There should not be any hindrance to the free flow of internal drain to downstream.
- The sewage or any unhygienic drainage (Treated or Untreated) should not be let into drain / channel / course at any cost and the debris and other materials should not be dumped into the drain / surplus course obstructing free flow of water. The applicants should make drainage network, at their own cost and the same is to be connected to natural storm water drainage / channel.
- The necessary setback distance should be provided with in the site as per site condition as per the norms in existence and as per the rules in force of CMDA (as per the circular issued by the office of the Commissioner of Town & Country Planning, Chennai - 2 vide Roc. No. 4367/2019-BA2/ Dated: 13.03.2019) during development and there should not be any construction activities in setback area in future also, the CMDA should issue completion certificate only after obtaining compliance certificate NOC from WRD.
- The applicants should clearly demarcate the boundary of their land before commencement of any developmental activities in the presence of Revenue, Local body and WRD authorities concerned without fail and should not encroach the Government land/ water body and the same should be maintained as it is in the Revenue records.
- The permission granted to the applicants, should not be altered / modified/ changed to any others. Based on the records submitted by the applicants, the permission is granted. If any documents seem to be fake / manipulated / fabricated, in future the above permission will be cancelled without any correspondence. Hence, the applicants are solely responsible of genuinty of the documents submitted.
- The WRD officers should be allowed to inspect the site at any time, during execution and thereafter, if necessary. Advance intimation should be given to the WRD officers concerned before commencement of work.
- The applicants should abide by the rules and regulation of the WRD from time to time. The applicants should also abide court of law of both State & Central Government from time to time.
- The applicants should get clearance certificate for this site from the Revenue department to make sure that the site is not an encroached property from the water body as well as confirming this proposed site boundaries.
- WRD is giving opinion only in connection with the inundation aspect and does not deliver any rights to the applicants to encroach the WRD / Government Lands SF.No. 120/2, 4 and 9 / river. The NOC for this site from the WRD is purely issued on the basis of inundation point of view.
- The sewage water from the applicant land should not let into the drain and for the disposal of the sewage water, suitable arrangements should be made for the same by the applicants, and as well as the construction materials/debris/garbage should not be dumped into the channel/river/tank at any cost. At any cost, sewage/sullage should not be let into channel/river, and the garbage, debris and construction materials should not be dumped into the channel/river restricting the free flow of water.
- The Government field Channel in S.F.No.132 should be completely desilted and re-sectioned by constructing retaining wall on either sides of the channel with concrete bed as per the FMB at the applicant's own cost. The bed level of the above channel should be ascertained and restored before commencing the development activity in the presence of the concerned WRD Executive Engineer. Moreover, the width of entire channel as per Revenue records (FMB) along & within the stretch of applicant's land should be maintained properly without any change and without encroachments.
- The Government field channel in S.F.No.132 stretch abutting the applicant boundary should be marked as per FMB and monitored and maintained by the applicant at his own cost. The width of the channel should be maintained without encroachments as per Revenue records and the hydraulic parameters of the field channel should be maintained. The applicant should make necessary periodical arrangements for free flow of water through the existing channel to the downside area within the proposed layout site. Also, the applicant should de-silt the channel periodically and remove the obstruction then and there without any hindrance for free flow of water at his own cost within the proposed land, after the completion of project also.
- The applicant should not carry out any other cross masonry structures, across the channels without prior permission from WRD.
- The applicants should not object at any time for the maintenance works / improvement works of the Channel which are proposed to be carried out by WRD. The applicants should give an undertaking in writing to the effect that the above proposal will not obstruct in case any maintenance/improvement/development works as per Revenue records [FMB], which are proposed to be carried out by WRD in future periodically.

The owner of the document received from the applicants in respect to the ownership is purely of applicant's responsibility and it is only for reference purpose to this department. The legal validity of this document should be verified by the Development / Revenue authorities. The specific remarks on inundation are purely issued on technical grounds in respect to the physical location of land.
Failing to comply with any of the above conditions, WRD reserves rights to withdraw the Technical opinion on inundation point of view to the above proposed site and in event, the applicants shall not be eligible for any compensation whatsoever and as well as legal entity.
(II) TNCDBR-2019 RULE NO: 47 (8) & AMENDMENTS APPROVED IN G.O.Ms.No.16, MAWS (MA1) DEPARTMENT DATED 31.1.2020 AND PUBLISHED IN TNGG ISSUE No.41 DATED:31.01.2020.
ONE PERCENT OF LAYOUT AREA EXCLUDING ROAD, ADDITIONALLY, SHALL BE RESERVED FOR "PUBLIC PURPOSE". WITHIN THE ABOVE CEILING 0.5% OF AREA SHALL BE TRANSFERRED TO THE LOCAL BODY AND 0.5% OF AREA SHALL BE TRANSFERRED TO THE TANGEDCO OR TO THE LOCAL BODY FREE OF COST THROUGH A REGISTERED GIFT DEED BEFORE THE ACTUAL SANCTION OF THE LAYOUT.

- (III) TNCDBR-2019, RULE NO: 47 (11)
THE COST OF LAYING IMPROVEMENTS TO THE SYSTEMS IN RESPECT OF ROAD, WATER SUPPLY, SEWERAGE, DRAINAGE OR ELECTRIC POWER SUPPLY THAT MAY BE REQUIRED AS ASSESSED BY THE CONCERNED AUTHORITY, NAMELY, THE LOCAL BODY AND TAMIL NADU ELECTRICITY BOARD, SHALL BE BORNE BY THE APPLICANT.
(IV) LOCAL BODY SHOULD ENSURE COMPLIANCE OF ALL THE CONDITIONS STIPULATED BY PWD IN THEIR LETTER NO.DB/T5(3)/F- NOC 02040 ARASANKALANI VILLAGE02832 / 2023 / DATED.27.04.2023, AND SHALL OBTAIN A LETTER FROM PWD CONFIRMING THE COMPLIANCE OF THE CONDITIONS BEFORE THE SANCTION AND RELEASE OF THE LAYOUT.
(V) THE APPLICANT IS RESPONSIBLE FOR THE SHAPE,SIZE & DIMENSIONS OF THE SITE UNDER REFERENCE.
⊙ NECESSARY SPACE FOR BUILDING LINE TO BE LEFT AS PER THE RULE IN FORCE WHILE TAKING UP DEVELOPMENT

LEGEND:

- SITE BOUNDARY
- ROADS GIFTED TO THE LOCAL BODY
- EXISTING ROAD
- PUBLIC PURPOSE-1 GIFTED TO THE LOCAL BODY
- PUBLIC PURPOSE-2 GIFTED TO THE TANGEDCO
- CONVENIENCE SHOP
- CHANNEL

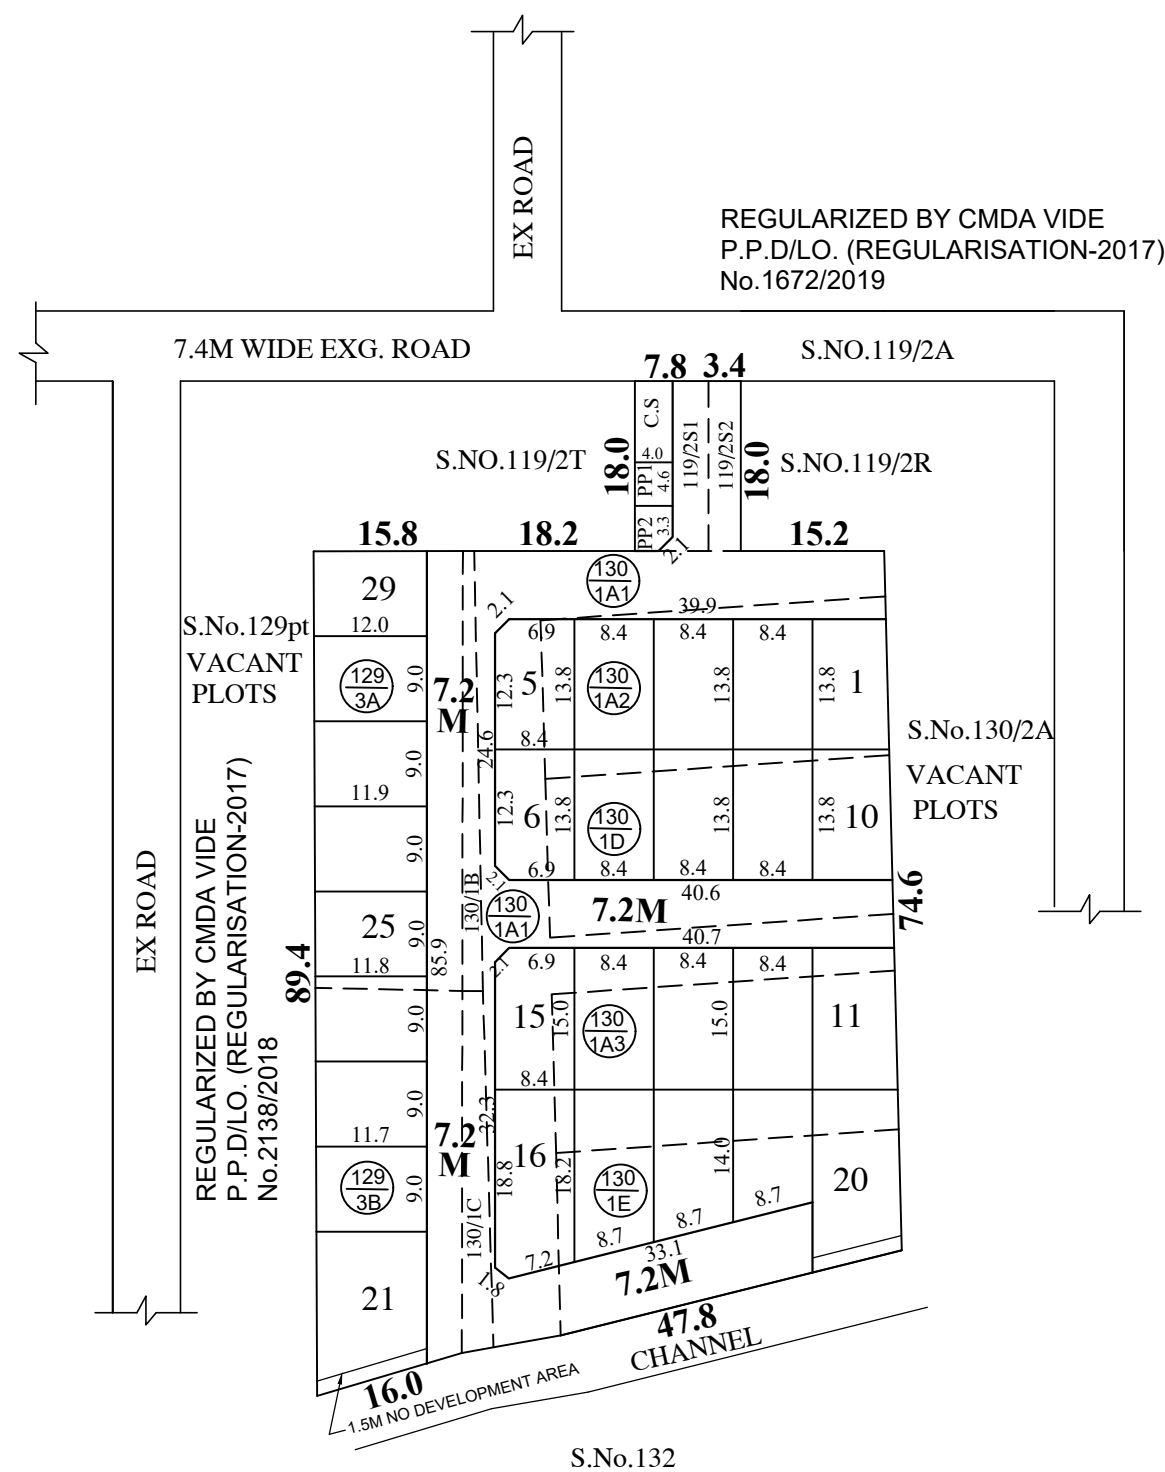

ST.THOMAS MOUNT PANCHAYAT UNION

LAYOUT OF HOUSE SITES IN S.Nos. 119/2S1, 2S2, 129/3A, 3B (129/3 AS PER PATTI), 130/1A1, 1A2,1A3, 1B, 1C, 1D, 1E(130/1 AS PER PATTI) OF ARASANKALANI VILLAGE.

SCALE-1:800 (ALL MEASUREMENTS ARE IN METRE)

CONDITIONS:
THE LAYOUT APPROVED IS VALID SUBJECT TO OBTAINING SANCTION FROM THE LOCAL BODY CONCERNED.

P.P.D NO : 142
L.O NO : 2023
APPROVED
VIDE LETTER NO : LAYOUT-1 / 0057 / 2023
DATE : 18 / 05 / 2023

OFFICE COPY
FOR SENIOR PLANNER (LAYOUT)
CHENNAI METROPOLITAN
DEVELOPMENT AUTHORITY

