PLAN SHOWING THE PROPOSED OFFICE CUM GODOWN BUILDING IN PLOT No.: D.60 AT TRUCK TERMINAL COMPLEX - MADAVARAM.
SURVEY No. 812/1A, PART & 812/1B PART
OF MADAVARAM VILLAGE, CHENGALPATTU MGR DISTRICT.

109

N.O.C. - ISSUED
VIDE FILE NO: M1/5383/94
DATED:- 18.10.94
LADS DN. : 42/94
N.O.C
C.R. Unnaly 20/10/94
FOR CHIEF EXECUTIVE OFFICER
M.M.D.A., MADRAS 600 008.

Planning Permit No. C|PP|3|96

APPROVED
SUBJECT TO THE CONDITIONS IN THIS OFFICE LETTER.
No. C2/23545/95 Date 9-1-96
FOR MEMBER SECRETARY
MADRAS METROPOLITAN DEVELOPMENT AUTHORITY
MADRAS - 600 008.

PLAN NO. 1
C2/23056/94

PART I
PART II
A.P.
D.P.

SCHEDULE OF JOINERY.

RS	ROLLING SHUTTER	8'0" x 8'0"	244 x 244
RS1	ROLLING SHUTTER	6'6" x 8'0"	200 x 244
D	DOOR	3'6" x 7'0"	107 x 213
D1	DOOR	3'0" x 7'0"	91 x 213
D2	DOOR	2'6" x 7'0"	76 x 213
W	WINDOW	5'0" x 4'6"	152 x 137
V	VENTILATOR	3'0" x 2'0"	91 x 61

COLOUR INDEX
PROPOSAL
EXISTING ROAD
PLOT BOUNDARY

SCALE: ONE INCH TO EIGHT FEET - 1:100

For Shreenivasa Lorry Services (Regd.)
Managing Partner

AREA DETAILS.
PLOT AREA: 111.02 m^2 OR 1200 SFT
G.F. AREA: 52.50 m^2
F.F AREA: 52.50 m^2
PLOT COVERAGE: 47 % FSI: 0.95

STAIR CASE DETAILS.
TREAD : 9" OR 23 CM
RISE : 7" OR 18 CM
WIDTH : 3'3" OR 100 CM

R.
Phone: 440782
R. Mohan Rao, D.C.E.
LICENSED SURVEYOR
Corporation of Madras
DEO. No. 15
AMB TYPE 3 Will Ship
ALANDUR Municipality
Consulting Engineer
Office: 95, Mudly Road,
NAGAR, MADRAS - 600 017
LICENSED SURVEYOR.

FRONT ELEVATION

SECTION ON 'AA'

PARAPET WALL 9" THICK
WEATHERING COURSE WITH PRESSED TILES
RCC ROOF SLAB 5" THICK IN RCC 1:2:4
BRICK WORK IN CM 1:6
RCC LINTEL IN RCC 1:2:4
SAND FILLING
FLOORING CONCRETE 1:3:6 X FLOOR FINISH

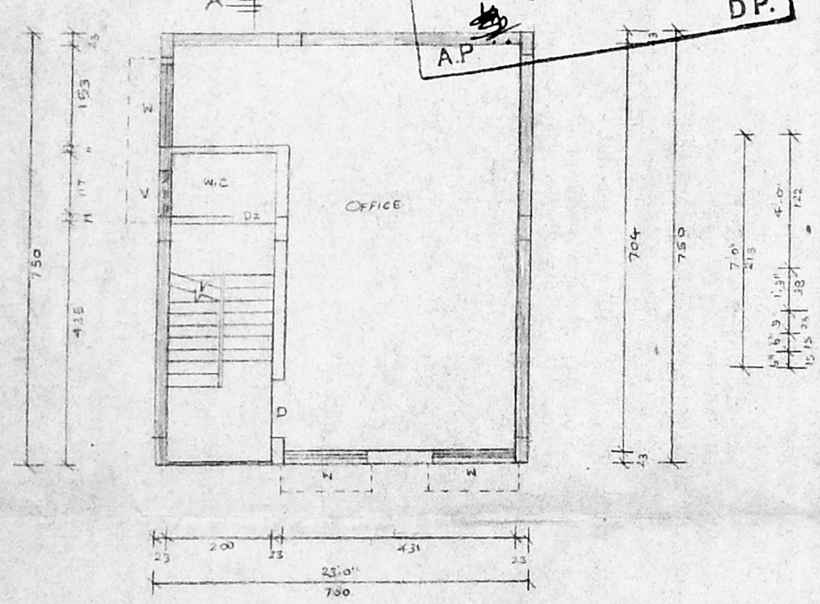

FIRST FLOOR PLAN.

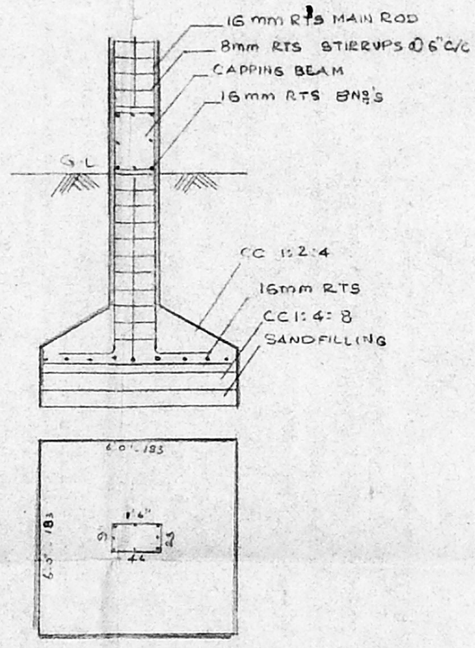

COLUMN FOUNDATION
SCALE: 1:50

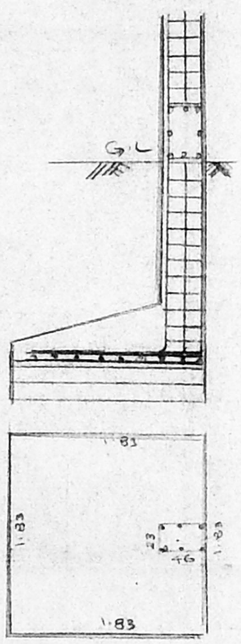

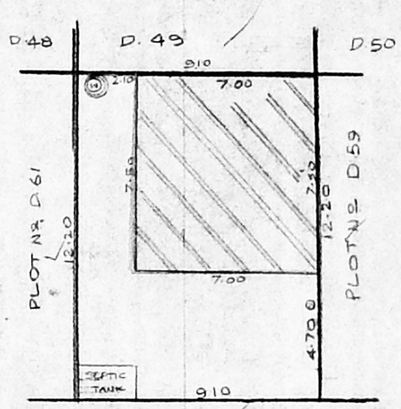

SITE PLAN SCALE 1:200

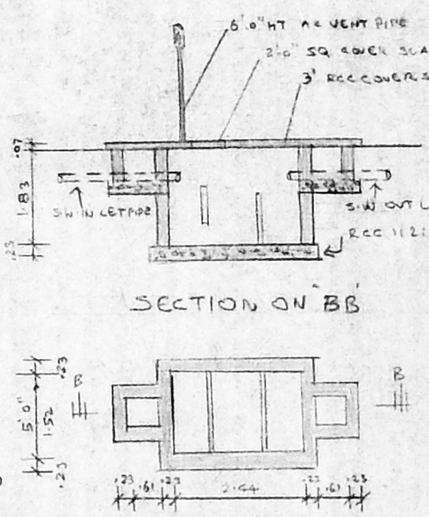

SECTION ON 'BB'

SEPTIC TANK PLAN.

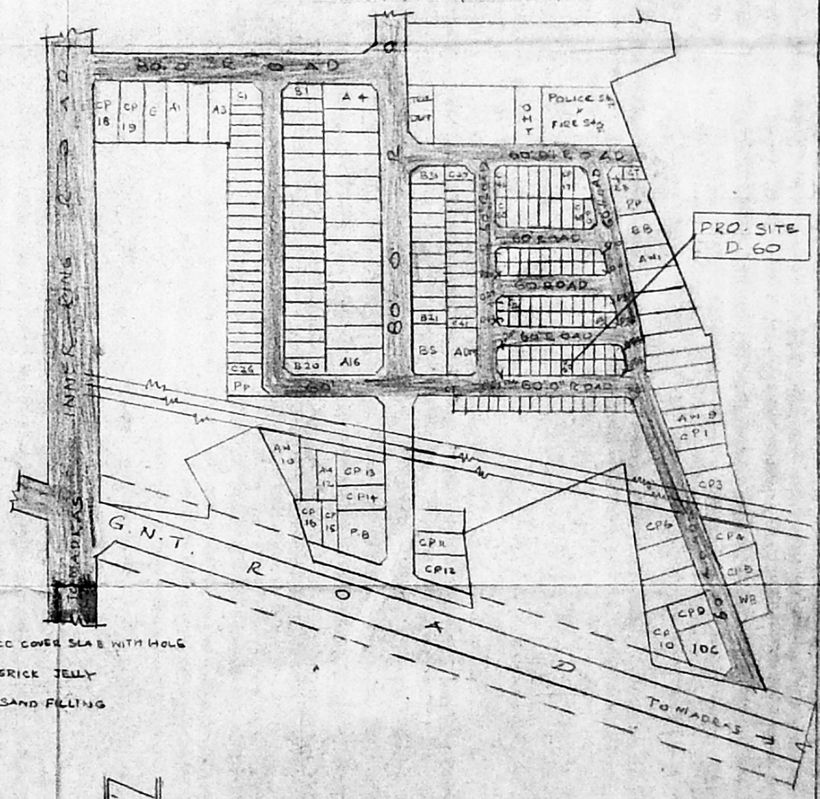

KEY PLAN.
SCALE: 1" = 320'-0"

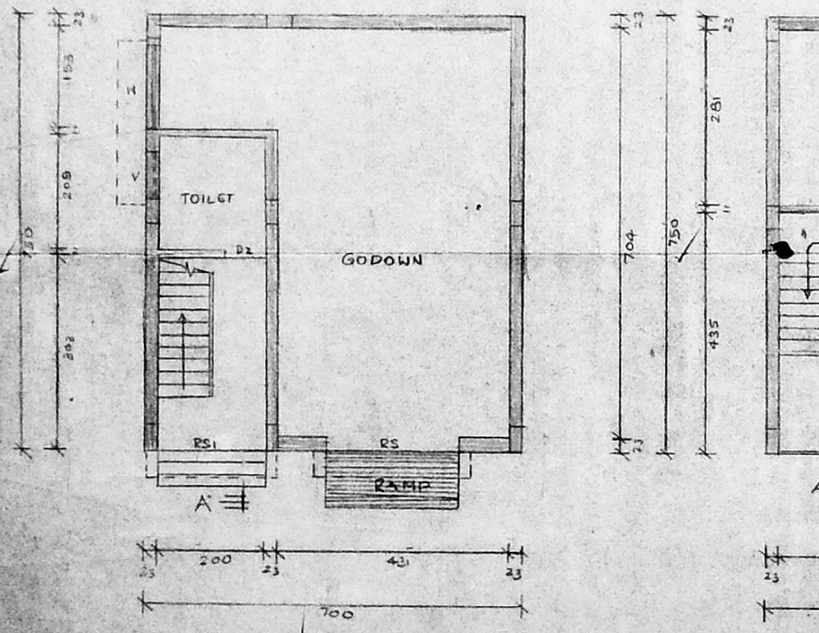

GROUND FLOOR PLAN.

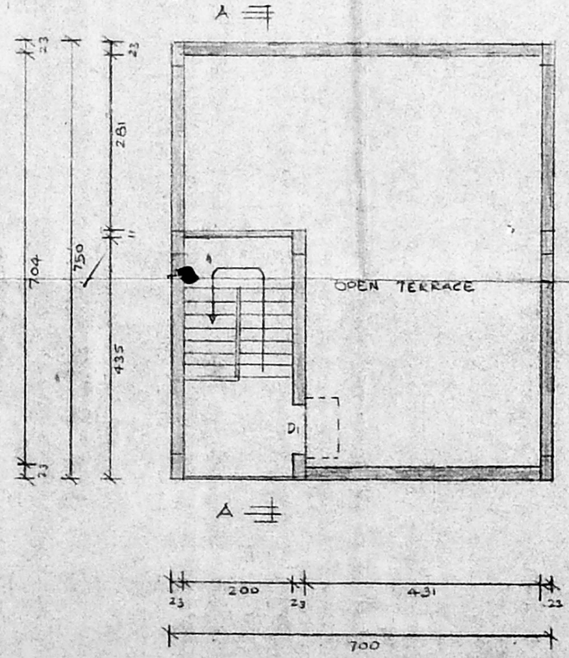

TERRACE PLAN.

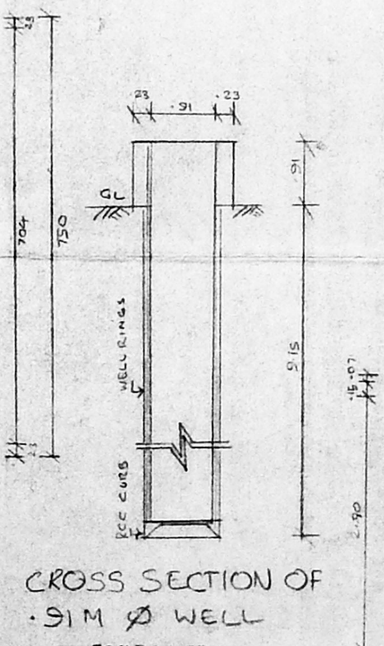

CROSS SECTION OF .91 M Ø WELL
SCALE: 1:75

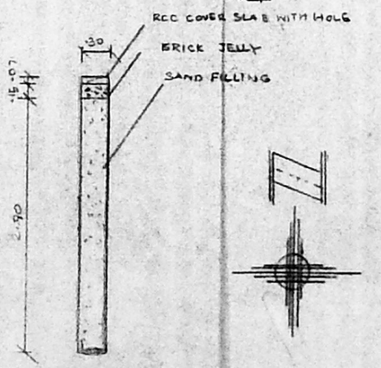

CROSS SECTION OF RAIN WATER STORAGE SCALE: 1:50