Revised plan

Scouting plan

A1/17423/95

A/20166/52/96
Planning Permit No.

APPROVED
SUBJECT TO THE CONDITIONS IN THIS OFFICE LETTER.
No. A1/3666/96 Date 22.2.96

FOR MEMBER SECRETARY
MADRAS METROPOLITAN DEVELOPMENT AUTHORITY
MADRAS - 600 008.

SPECIFICATIONS

FOUNDATION : BRICK FOOTING OVER P.C.C. 1:4:8 & SAND FILLING
BRICK WORK : BRICK WK. IN CM 1:6 IN BASEMENT & 1:5 IN SUPER STRUCTURE
ROOFING : R.C. SLAB 1:2:4 WITH 0.8% OF REINFORCEMENT
WATER PROOFING : SLOPE CONCRETE WITH BRICK JELLY IN LIME AND ONE COURSE OF PLAT TILES SET IN CM 1:3
PLASTERING : WALLS AND CEILING IN 12 MM TC
FLOORING : MOSAIC FLOORING
FINISHES : INTERIOR PAINTED WITH DISTEMBER
EXTERIOR WITH DRY DISTEMBER
PAINTING : DOORS & WINDOWS SYNTHETIC PAINT

JOINERY DETAILS

D DOOR	-	3'-6" x 7'-0" (1.07 x 2.10)
D1 DOOR	-	3'-0" x 7'-0" (0.91 x 2.10)
D2 - DOOR	-	2'-6" x 7'-0" (0.76 x 2.10)
W - WINDOW	-	5'-0" x 4'-6" (1.50 x 1.37)
W1 - WINDOW	-	4'-0" x 4'-6" (1.20 x 1.37)
W2 - WINDOW	-	3'-0" x 4'-6" (0.91 x 1.37)
V1 - VENTILATOR	-	3'-6" x 2'-0" (1.07 x 0.61)
V2 - VENTILATOR	-	2'-0" x 2'-0" (0.61 x 0.61)
J - JOLLY	-	3'-6" x 4'-0" (1.07 x 1.37)

AREA DETAILS

EXTENT : 1640 SQ.FT 152.35 SQ.m
GROUND FLOOR AREA : 855 SQ.FT 79.43
FIRST FLOOR AREA : 855 SQ.FT 79.43
SECOND FLOOR AREA : 350 SQ.FT 32.51
COVERAGE : 60% FSI : 1:42

COLOUR INDEX

PROPOSED
ROAD
BOUNDARY
EXISTING

PLAN SHOWING THE PROPOSED ADDITIONAL CONSTRUCTION AT PLOT NO. 16, MASILAMANI STREET MANDAVELLI, MADRAS

SCALE : 1" = 8'-0" (1:100)

OWNER

Dr. K. VENUGOPAL, Regd. A.E.E.
CORPORATION OF MADRAS
Civil & Sanitary Engineering ons
Licensed Surveyor, Class-I No:
Licensed Plumber, Class-I Metro W
Sewerage No..... Water Supply N
8, Neelakandan Street, Nungambakkam Lake
Backside of Corporation Girls Higher Secondary Sch
MADRAS - 600 034
LICENSED SURVEYOR

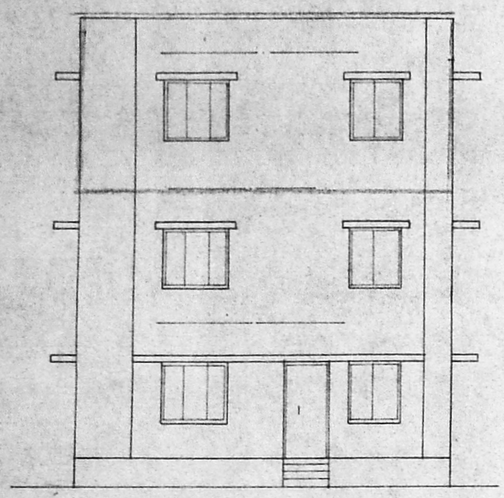

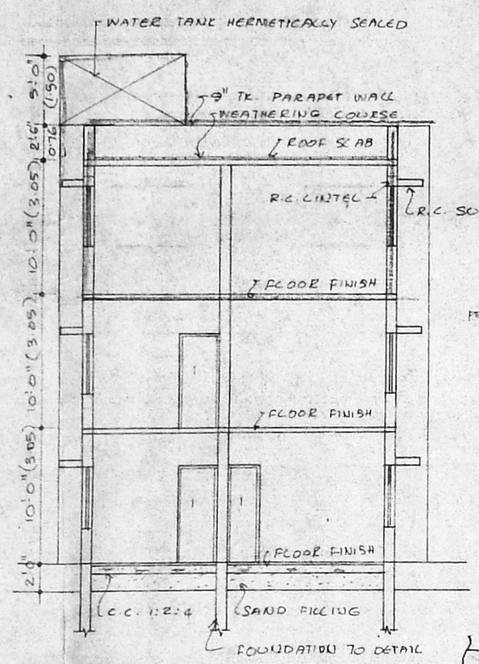

SECTION - A - A

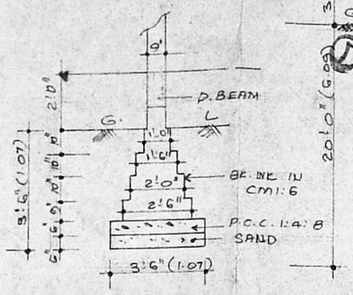

WALL FOOTING DETAILS

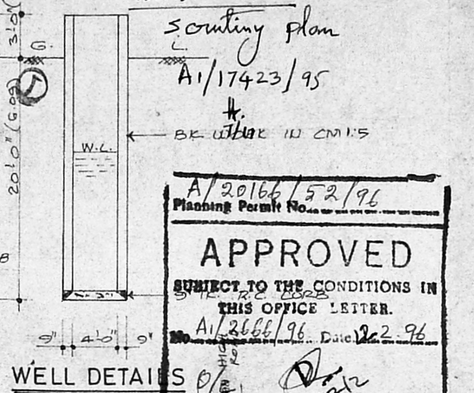

WELL DETAILS

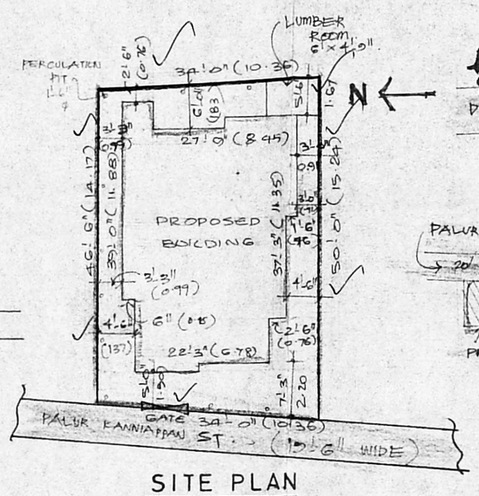

SITE PLAN
1"=16'-0" (1:200)

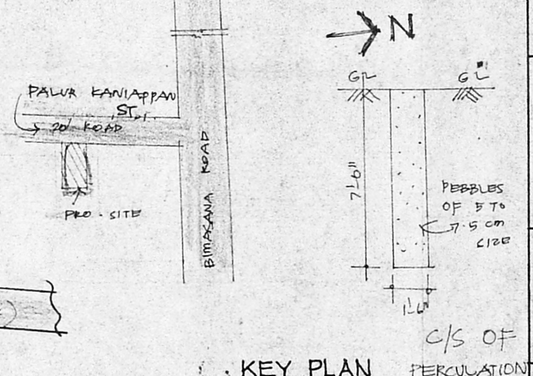

KEY PLAN
(NOT TO SCALE)

C/S OF PERCOLATION PIT

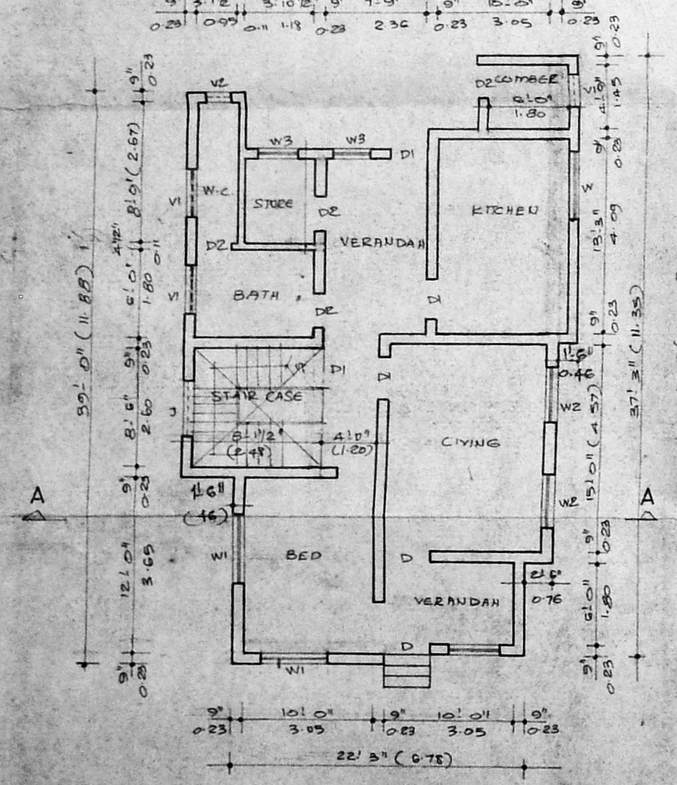

GROUND FLOOR PLAN

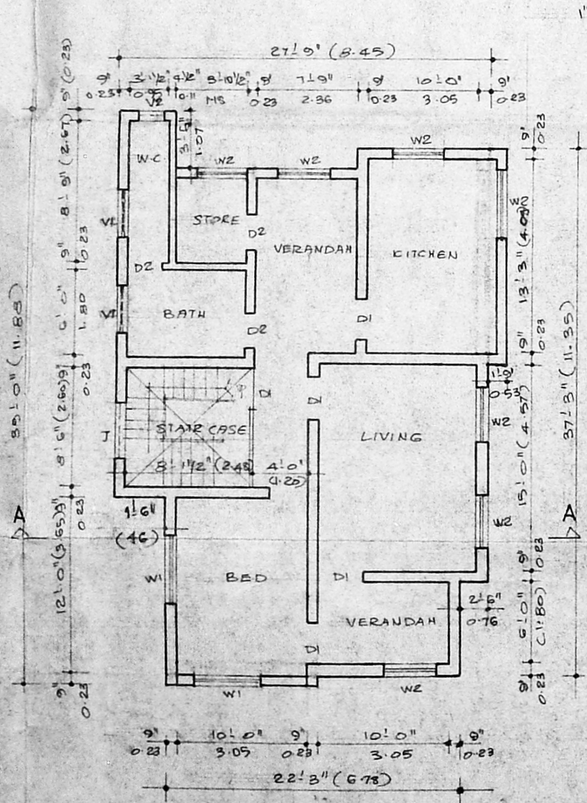

FIRST FLOOR PLAN

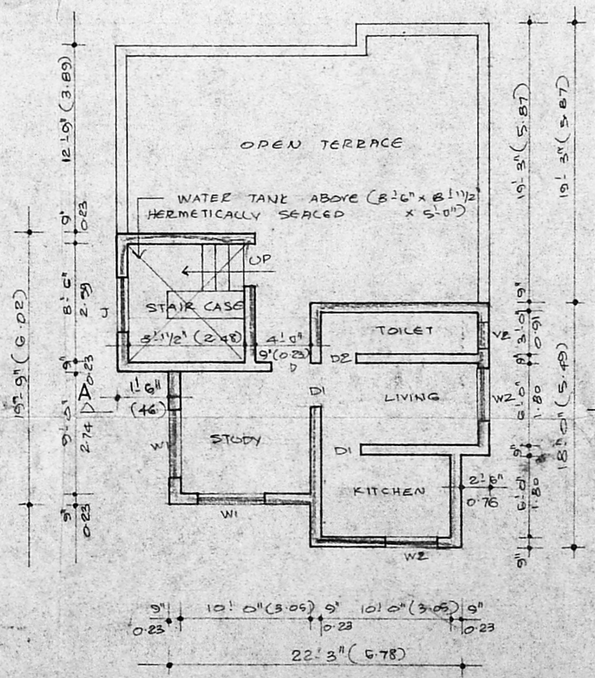

SECOND FLOOR PLAN