REVISED

PLAN SHOWING THE PROPOSED CONSTRUCTION OF A HOUSE IN DOOR No. 34, KARUNEEKAR STREET, S.No. 193 (PART) OF ADAMBAKKAM VILLAGE, ALANDUR MUNICIPALITY, KANCHEEPURAM DISTRICT.,

SCALE 1" = 8'0" (1CM = 1M)

JOINERY

D	FLUSHED DOOR	3'5½" x 7'0" (1.99 x 2.1)
D1	FLUSHED DOOR	2'6" x 6'6" (.76 x 1.9)
W	GLAZED WINDOW	4'0" x 4'6" (1.21 x 1.4)
V	GLAZED VENTILATOR	3'0" x 2'0" (.91 x .60)
GD	GRILLED DOOR	3'0" x 7'0" (.91 x 2.1)

OWNER : S.D. and I.S. JAYARAMAN

COLOUR INDEX

PROPOSED CONSTRUCTION
EXG. BLDG TO BE DEMOLISHED
ROADS
SITE BOUNDARY

AREA DETAILS

PLOT EXTENT	770.6 SFT	71.5 M²
GROUND FLOOR AREA	481.0 "	44.6 "
FIRST FLOOR AREA	481.0 "	44.6 "
EXG BLDG TO BE DEMOLISHED	478.7 "	44.4 "
PLOT COVERAGE	62.4 %	
F.S.I	1.2	

K. SELVAM. BE. AMIE. C.Eng (I) A.I.V.
Consulting Civil Engineer Chartered Engineer.
Approved Valuer, Licensed Surveyor
Class-I, Reg. No. 319/98-99
Corporation of Chennai & Ambattur Municipality
No. 1 (373 Mogappair East.
CHENNAI. 600 050.

LICENSED SURVEYOR.

WEATHERING COURSE IN C.M 1:3 MIX
R.C.C ROOF SLAB IN 1:2:4 MIX
BRICK WORK IN C.M 1:4 MIX
PLASTERING IN C.M 1:4 MIX
FLOOR FINISHING IN C.M 1:3 MIX
R.C.C FLOOR SLAB
FLOORING IN C.C 1:4:8 MIX
P.C.C IN 1:8:10
SAND FILLING
R.C.C LINTEL

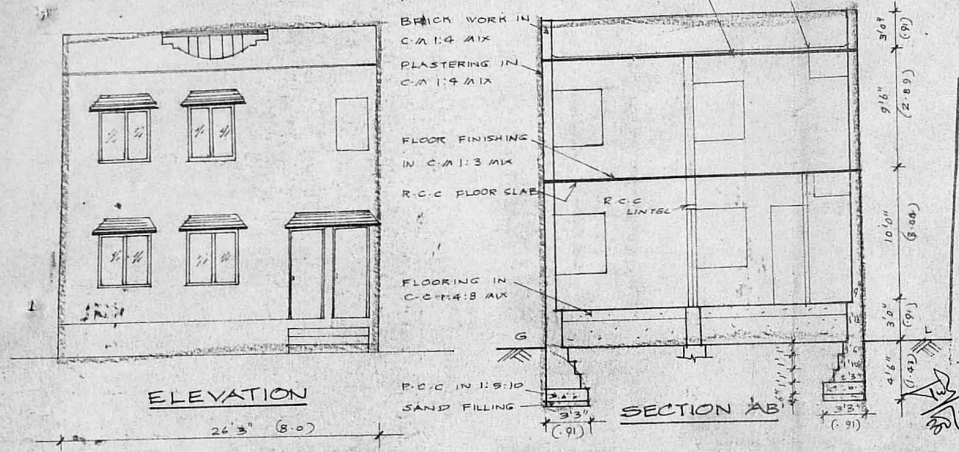

ELEVATION — 26'3" (8.0)

SECTION AB

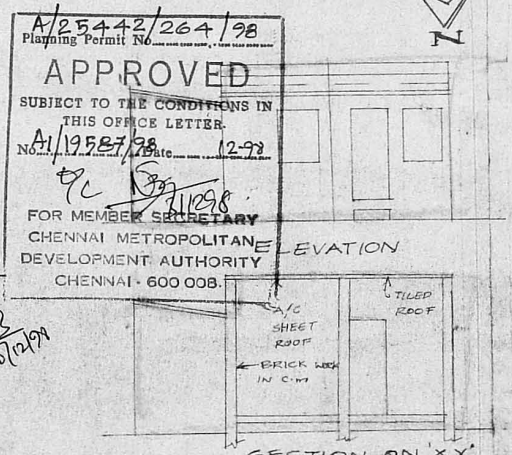

ELEVATION

SECTION ON XY

A/25442/264/98
Planning Permit No.
APPROVED
SUBJECT TO THE CONDITIONS IN THIS OFFICE LETTER.
No. A1/19587/98 Date 12-98
FOR MEMBER SECRETARY
CHENNAI METROPOLITAN DEVELOPMENT AUTHORITY
CHENNAI - 600 008.

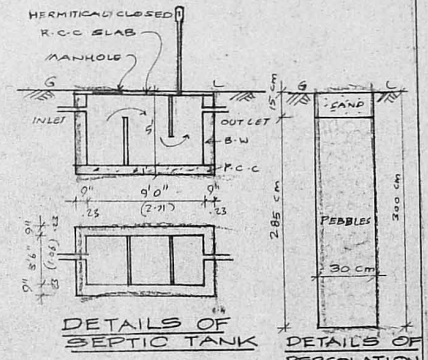

DETAILS OF SEPTIC TANK

DETAILS OF PERCOLATION PIT

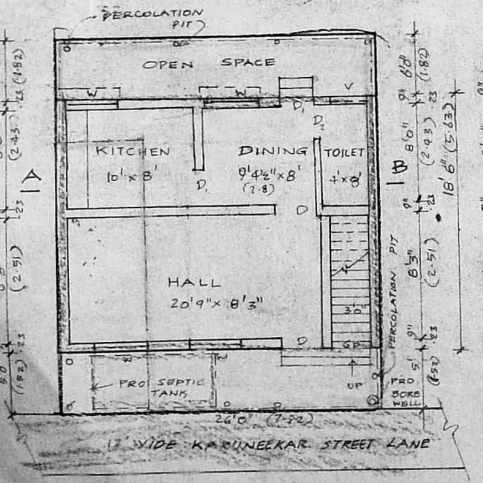

SITE PLAN AND GROUND FLOOR PLAN

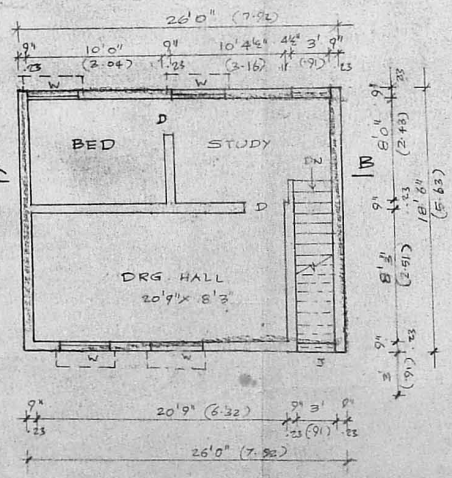

FIRST FLOOR PLAN

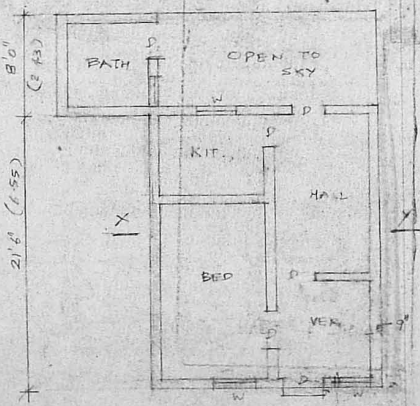

PLAN (TO BE DEMOLISHED)

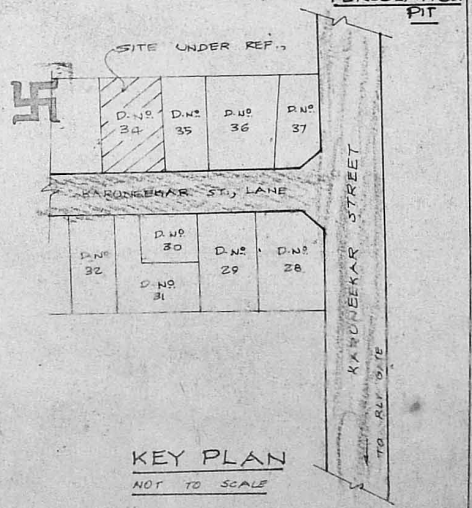

KEY PLAN
NOT TO SCALE