WEATHERING COURSE IN BJELLY & LIME WITH ONE COURSE TILES.
R.C.C. ROOF SLAB 4½" TK IN C.M 1:2:4.
B.W. IN CM 1:6 WITH STANDARD BRICKS.
R.C.C. LINTELS, SUNSHADES, LOFTS IN C.M 1:2:4.
FLOORING WITH MOSAIC TILES OVER P.C.C. 1:4:8.
DOORS PANELLED _ WINDOWS GRILLED.

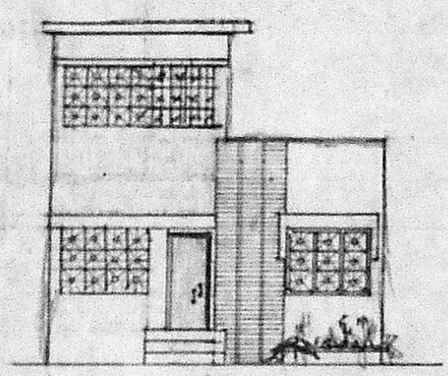

FRONT ELEVATION

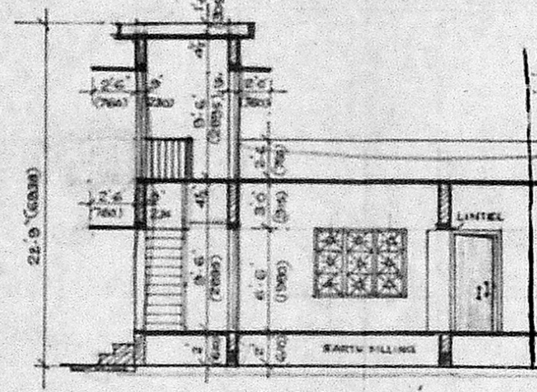

SECTION A-A'

Planning Permit No. A/539/89

APPROVED

Subject to the conditions in this office letter No. A/2652/89 Dt. 19-6-89

G. Vijayalakshmi 19.6.89

FOR MEMBER SECRETARY
MADRAS METROPOLITAN DEVELOPMENT AUTHORITY

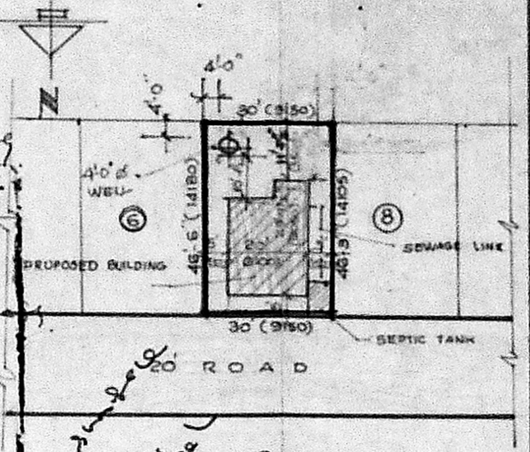

SITE PLAN

SCALE 1" = 32'0" (1:400)

Inspected the site on 20.4.89 (N) 16.6.89
Vacant site
Plinth 20'0" wide mud surface
Cleaned
Q. Ishtu are provided
Lower Pond Lands
Pond Lands
Lower Pond Lands

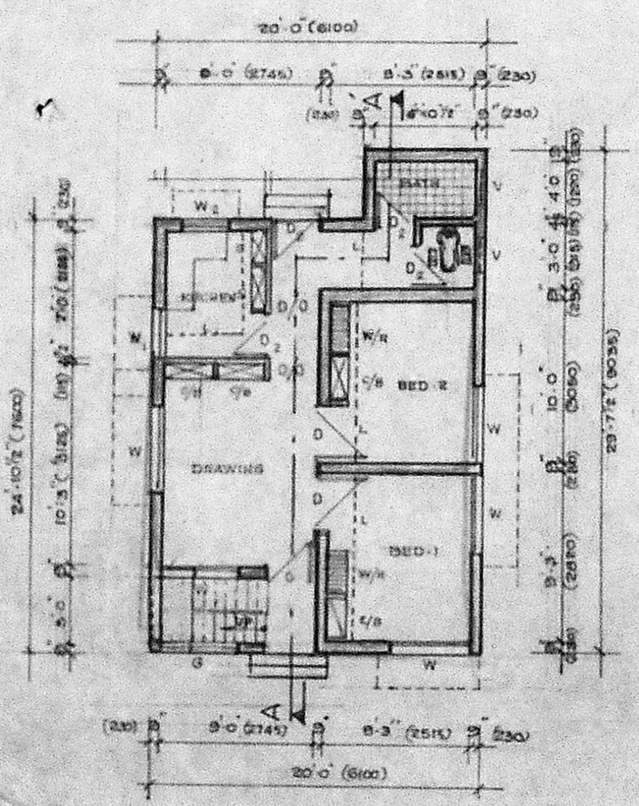

PLAN OF GROUND FLOOR

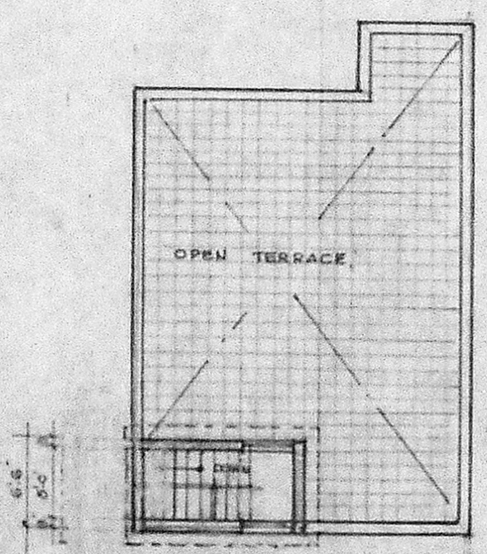

PLAN OF TERRACE FLOOR

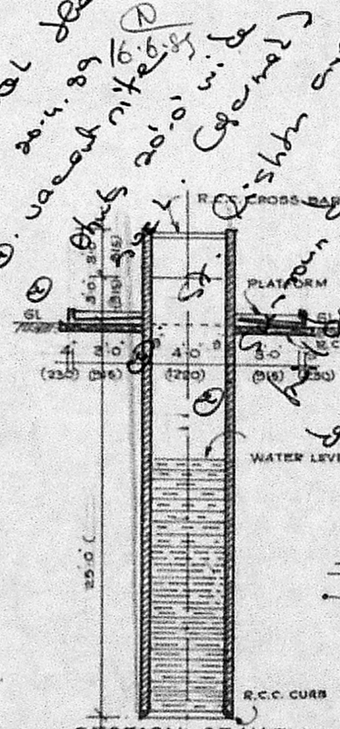

SECTION OF WELL

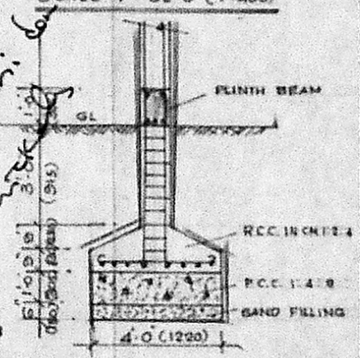

FOUNDATION DETAILS

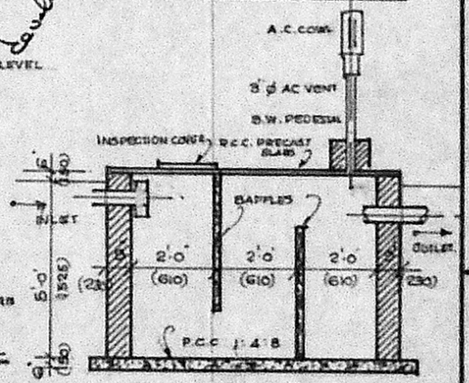

SECTION OF SEPTIC TANK



PLAN OF WELL

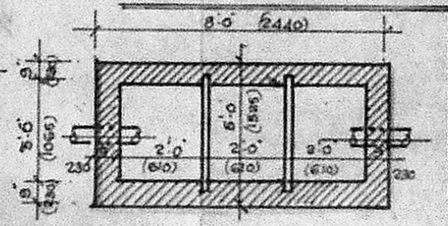

PLAN OF SEPTIC TANK

SCHEDULE OF JOINERY

D DOOR	3'-3" × 6'-6"	(990 × 1980)
D_1 DOOR	3'-0" × 6'-6"	(915 × 1980)
D_2 DOOR	2'-6" × 6'-6"	(760 × 1980)
D/O DOOR OPENING	2'-6" × 6'-6"	(760 × 1980)
W WINDOW	5'-0" × 4'-0"	(1525 × 1220)
W_1 WINDOW	3'-0" × 4'-0"	(915 × 1220)
W_2 WINDOW	3'-0" × 2'-0"	(915 × 610)
V VENTILATOR	2'-0" × 1'-6"	(610 × 460)

W/R. WARDROBE
C/B CUPBOARD
S SHELF
L LOFT.

(P) 24.3.89

CONSTRUCTION DETAILS

PLOT AREA	1387 sft	(129.00 m²)
GROUND FLOOR AREA	537.28 sft	(50.00 m²)
VACANT AREA	849.72 sft	(79.00 m²)
CARPET AREA	420.56 sft	(39.12 m²)
PLOT COVERAGE	38.7%	(38.7%)

COLOUR INDEX

PROPOSED
ROADS
BOUNDARY
SEWAGE

SKETCH SHOWING THE PROPOSED DWELLING HOUSE, IN PLOT. NO.7, IN SRI. GANAPATHY NAGAR COLONY, T.S. NO. 79 (old No 63) CORP. DIVISION NO. 146, AT. 121, EKKATTUTHANGAL VILLAGE, MADRAS, FOR Thiru V.J. ANAIYAPPAN & Tmty A. REVATHY (SCALE 1" = 8'0")

(Thiru V.J. ANAIYAPPAN & Tmty A. REVATHY)

OWNERS

N. JOACHIM SELVARAJ, B.E.
Consulting Engineer,
Licensed Surveyor,
Class I No: 65, 34 Arcot Road,
KODAMBAKKAM, MADRAS-600 024.

LICENCED SURVEYOR