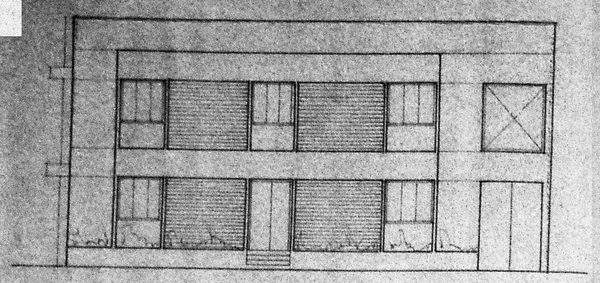

ELEVATION.

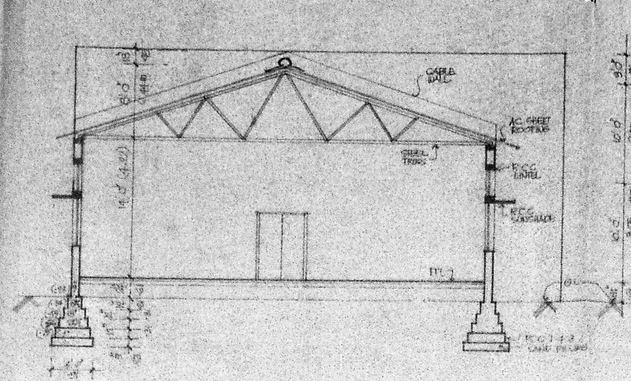

SECTION B.B.



SECTION S.S

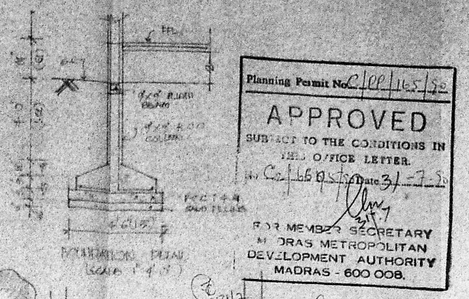

Planning Permit No. C/ee/165/92

APPROVED

SUBJECT TO THE CONDITIONS IN THIS OFFICE LETTER.

No. C2/1669/92 Date 31-7-92

for MEMBER SECRETARY
MADRAS METROPOLITAN DEVELOPMENT AUTHORITY
MADRAS - 600 008.

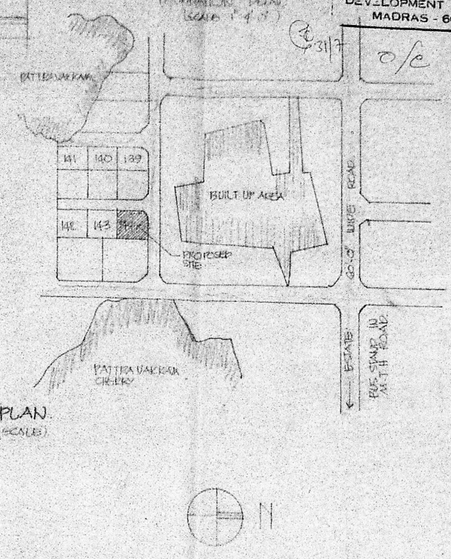

KEY PLAN.
(NOT TO SCALE)

N

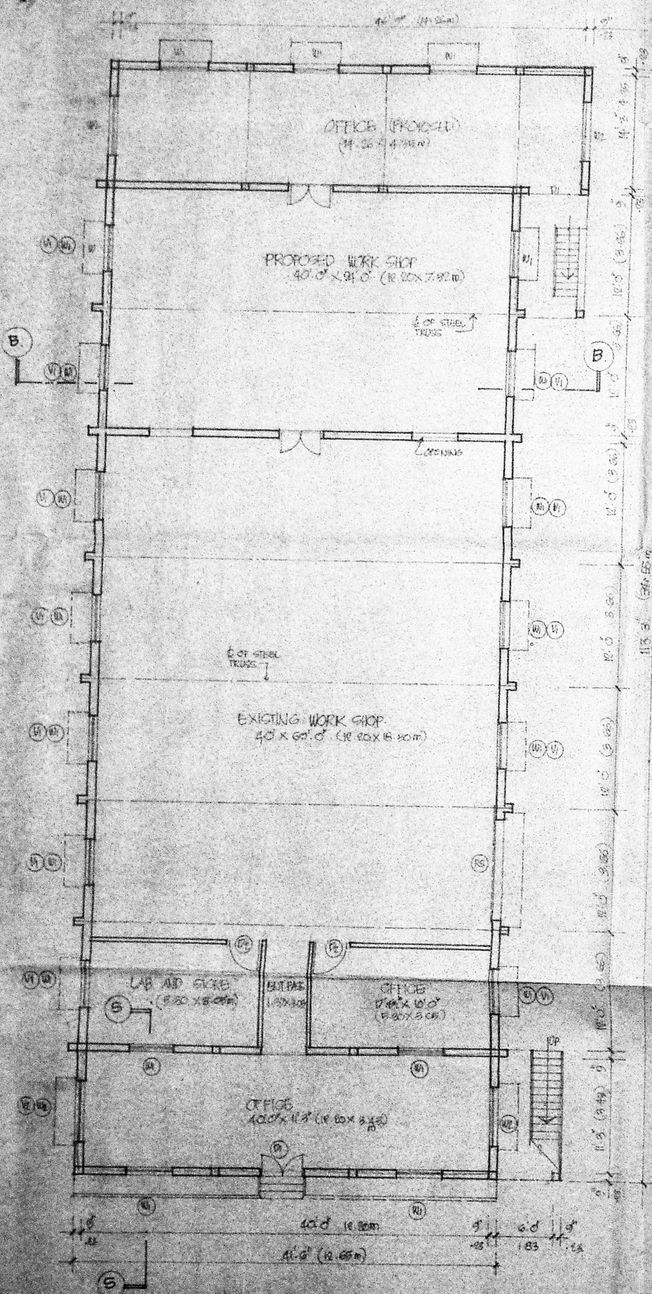

GROUND FLOOR PLAN.

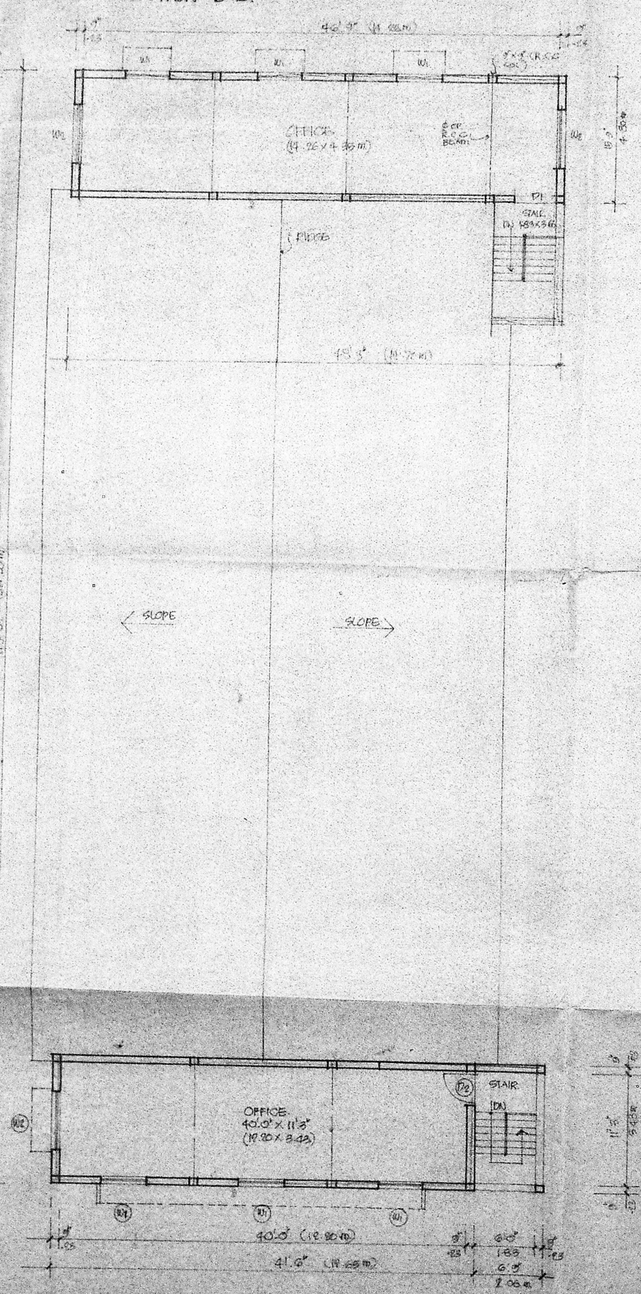

FIRST FLOOR PLAN.

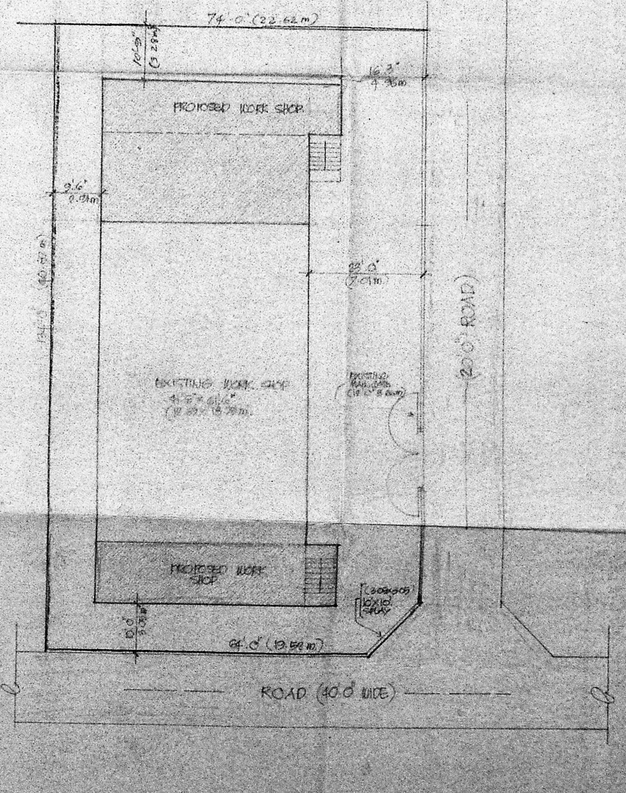

SITE PLAN.
SCALE 1"=10'-0"

SCHEDULE OF JOINERY

DOORS	D1	4'-0" x 7'-0" (1.20m x 2.10m)
	D2	3'-0" x 7'-0" (0.90m x 2.10m)
	D3	
WINDOWS	W1	4'-0" x 4'-0" (1.20m x 1.20m)
	W2	6'-0" x 4'-0" (1.80m x 1.20m)
VENTILATOR	V1	1'-6" x 3'-0" (0.45m x 0.90m)
	V2	3'-0" x 3'-0" (0.90m x 0.90m)

SPECIFICATIONS

1. BR. UR. IN C.M. 1:6. FOR OUTER STRUCTURE OF BUILDINGS & PLASTERING IN C.M. 1:6. FOR CEILING OF HALLS.
2. R.C.C. 1:2:4 FOR COLUMNS, LINTEL, SUNSHADE, ROOF SLAB, & ETC.
3. WEATHERING COURSE WATERPROOF CEMENT.
4. R.C.C. FLOORING 1:2:4.

AREA STATEMENT

	SQ.M	SQ.FT
SITE EXTENT	9716.0	104179
EXISTING PLINTH AREA	1092.9	11764
PROPOSED PLINTH IN GROUND FLOOR	1817.0	19556
PROPOSED PLINTH IN FIRST FLOOR	1260.0	11707
TOTAL PROPOSED AREA	3077.0	33263
TOTAL AREA	4169.9	44827
PLOT COVERAGE F.S.I.	SQ.M 1817.0 / 9716.0 = 0.187	SQ.FT 19556 / 104179 = 0.187

REFERENCE

SCALE 1" = 8'-0"
DATE 4.6.92
DRAWN
CHD

INDEX

PROPOSED WORK
EXISTING WORK
EXISTING ROADS
SITE BOUNDARY

PROPOSED ADDITIONAL CONSTRUCTION IN PLOT NO. 144, SIDCO INDUSTRIAL ESTATE, NORTH PHASE AMBATTUR, MADRAS. 98.
BY M/S. AUTOMOTIVE INDUSTRIAL SEALS.

mrs m Verghese
mrs. Raji Subramanian
K. Narayanan Kutty

OWNER'S SIGNATURE

Phone: 652262
S. RAGHAVACHARI,
L.C.E., M.I.S.E. (A.I.T.), M.I.C.C., M.I.C.I.
Town Planning Officer (Retd.) & Consulting Engineer,
Lic. No. T.P.O. / ENGINEERS CORPORATION CLASS I No. 348
6 A, AMBATTUR, AVADI ANNEXE MUNICIPALITY
72-B, Rukmani Street, Krishnaswamy,
AMBATTUR, MADRAS-600 053.
LICENSED SURVEYOR